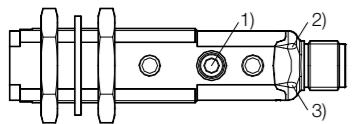
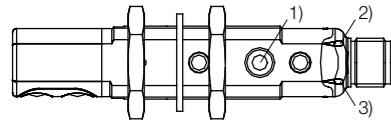


Produktinformationen**Gerade Version (BOS 18KF-...)****Winkelversion (BOS 18KW-...)**

1) Set-Taste
2) Ausgangs-LED
3) Stabilitäts-/Fehler-LED

Sicherheitshinweise

Achtung! Diese optoelektronischen Sensoren dürfen nicht in Anwendungen eingesetzt werden, in denen die Sicherheit von Personen von der Gerätefunktion abhängt (kein Sicherheitsbauteil gem. EU-Maschinenrichtlinie). Vor Inbetriebnahme ist die Betriebsanleitung sorgfältig zu lesen.

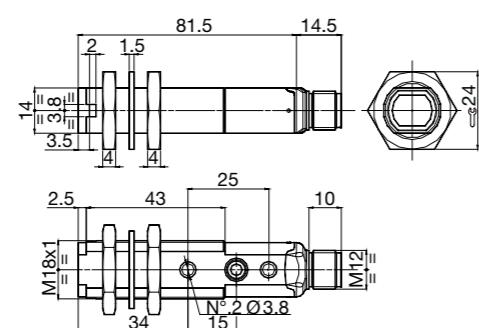
Achtung! Das Gerät nicht öffnen. Das Gerät enthält keine Komponenten, die vom Benutzer eingestellt oder gewartet werden müssen.

CE Mit dem CE-Zeichen bestätigen wir, dass unsere Produkte den Anforderungen der aktuellen EMV-Richtlinie entsprechen.

In unserem EMV-Labor, das von der DATech für Prüfungen der elektromagnetischen Verträglichkeit akkreditiert ist, wurde der Nachweis erbracht, dass die Balluff Produkte die EMV-Anforderungen der Norm IEC 60947-5-2 erfüllen.

Montage

Zum Betrieb sind keine weiteren Schutzmaßnahmen erforderlich.

Gerade Version (BOS 18KF...-S4-C)**Montage (Fortsetzung)**

Stets eine Befestigungsmöglichkeit wählen, mit der beste Einsicht und einfachster Zugriff von Anzeige- und Bedienelementen gewährleistet ist.

Die Tastweite/Reichweite wird ab Optikfläche gemessen.

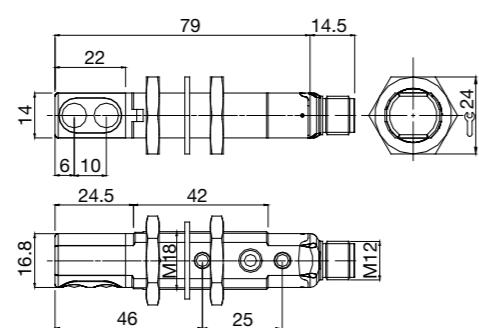

Die Erfassung eines Objektes wird verbessert, wenn die Entfernung von Objekt zur Optikfläche vergrößert oder verringert wird und die Bewegungsrichtung des Objekts gemäß Abbildung beachtet wird.



Bevorzugte Anfahrrichtung

Anschlüsse**Kabelversion**

Braun	1	+ 10...30 V DC
Weiß	2	NC output
Schwarz	4	NO output
Blau	3	- 0 V

Winkelversion (BOS 18KW...-S4-C)**Kabelversion (BOS 18K...-C-__)**

...-C-02: 2 m Kabel

Die Sensoren können in einer Bohrung 18 mm befestigt werden. Dafür sind die Unterlegscheibe und die zwei Muttern (SW24, maximales Anzugsdrehmoment von 1,5 Nm) zu verwenden.

Alternativ dazu kann der Sensor auch über die beiden Löcher im Gehäuse mit zwei Schrauben (M3x22 oder länger) plus Unterlegscheibe befestigt werden.

Steckerversion (M12)**Anzeige- und Bedienelemente****Ausgangs-LED**

Die gelbe LED signalisiert, dass der Ausgang durchgeschaltet ist.

Stabilitäts-/Fehler-LED

Leuchtet die grüne LED konstant, dann arbeitet der Sensor stabil (Stabilitätsanzeige). Blinkt die grüne LED, dann liegt ein Fehler vor (Fehlermeldung).

Teach-In

Dieser Sensor verfügt über eine Teach-In-Taste.

Einstellung**Teach-In**

Der Sensor verfügt über eine Teach-In-Einstellung. Dadurch ist eine schnelle, präzise und automatische Einstellung der Schaltschwelle garantiert.

Zwei unterschiedliche Einstellungen sind möglich:

- Standard:
Teach-In Taste ca. 2 s drücken.
- Feineinstellung (nur anwenden, wenn die Standard Einstellung nicht ausreichend sein sollte, oder wenn Objekt und Hintergrund nahe beisammen sind):
Teach-In-Taste > 3 s drücken.

Hinweis: Entweder das auszublendende Objekt oder der Hintergrund müssen vorhanden sein.

Standard Einstellung

1. Sensor montieren und auszublendendes Objekt oder Hintergrund innerhalb des Tastbereiches plazieren.
2. Teach-In-Taste ca. 2 s drücken bis Stabilitäts-LED erlischt. Dann Taste sofort loslassen.

Der Sensor ist nun betriebsbereit und detektiert alle Objekte innerhalb dieses erlernten Arbeitsbereiches.

Feineinstellung

1. Sensor montieren und auszublendendes Objekt oder Hintergrund innerhalb des Tastbereiches plazieren.
2. Teach-In Taste ca. 3 s drücken bis Stabilitäts-LED erlischt. Teach-In-Taste weiter gedrückt halten bis die Stabilitäts-LED grün blinkt.

Nach Loslassen der Teach-In-Taste nimmt der Sensor eine Feineinstellung vor und ist danach in der Lage auch Objekte unmittelbar vor dem ausgeblendeten Hintergrund zu erfassen.

Technische Daten**Optisch**

Funktionsprinzip	Lichttaster mit Hintergrundausblendung
Betriebsart	heilschaltend bei Ausgang NO / dunkelschaltend bei Ausgang NC
Reichweite (typische Werte)	Hintergrundausblendung
BOS 18KW-...	50...100 mm
BOS 18KF-...	50...150 mm
Lichtart Sender	LED Rotlicht, 630 nm

Elektrisch

Betriebsspannung	10...30 V DC
Restwelligkeit	≤ 2 Vpp
Stromaufnahme (ohne Last)	< 30 mA

Ausgänge	NO und NC; PNP oder NPN je nach Variante (kurzschlussfest)
Ausgangsstrom	≤ 100 mA
Spannungsfall	≤ 2 V
Ansprechzeit	1 ms
Schaltfrequenz	500 Hz

Mechanisch

Anschlussart	2-m-Kabel Ø 4 mm oder M12-Stecker, 4-polig
Gehäusematerial	PBT
Linsenmaterial	PMMA
Gewicht	75 g max. Kabelvarianten / 25 g Steckervarianten
Einstellung	Teach-In-Taste

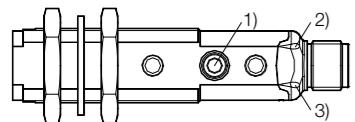
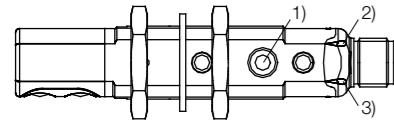
Anzeigen

Ausgangsanzeige	gelbe LED
Stabilitätsanzeige	grüne LED leuchtet
Fehleranzeige	grüne LED blinkt

Umgebung

Fremdlicht	gem. IEC 60947-5-2
Umgebungs-temperatur	-25...+55 °C
Lagertemperatur	-25...+70 °C
Schutzzart	IP67



Produkt Information**Axial version (BOS 18KF-...)****Radial version (BOS 18KW-...)**

1) Set pushbutton
2) Output LED
3) Stability / Error LED

Safety Notes

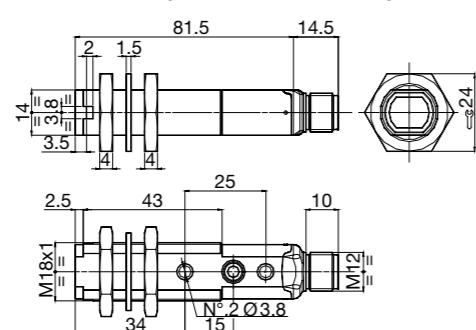
! These photoelectric sensors may not be used in applications where personal safety depends on proper function of the devices (not safety designed per EU machine guideline). Read these operating instructions carefully before putting the device into service.

Notice!
Do not try to open the module enclosure.
There are no user-serviceable components inside.

CE The CE Mark verifies that our products meet the requirements of the current EMC Directive.
In our EMC Laboratory, which is accredited by the DATech for Testing of Electromagnetic Compatibility, proof has been documented that these Balluff products meet the EMC requirements of the harmonized standard IEC 60947-5-2.

Installation

No additional protective measures are necessary for operation.

Axial version (BOS 18KF-...-S4-C)**Installation (continued)**

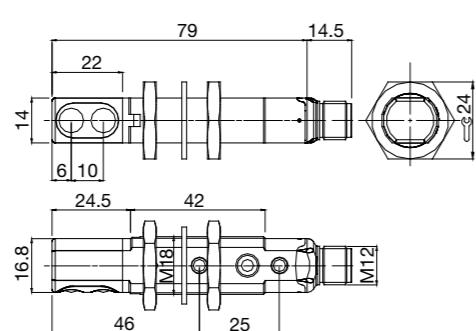

Amongst the various possible solutions, we suggest to choose the combination that offers the best visibility of the signalling LEDs and the easiest access to the Teach-In pushbutton.

The operating distance is measured from the front surface of the sensor lens.

For the best detection, the object has to move closer or further away from this surface. In presence of a lateral movement, the object has to move as indicated in the drawing.

**Wiring Diagrams****Cable version**

Brown	1	+ 10...30 V DC
White	2	NC output
Black	4	NO output
Blue	3	- 0 V

Radial version (BOS 18KW-...-S4-C)**Cable version (BOS 18K...-C-...)**

The sensor can be fixed by means of the M18x1 threaded body through a 18 mm hole, using the specific washer and the two CH.24 nuts enclosed (1.5 Nm maximum tightening torque).

Alternatively, the sensor can be mounted through the two housing's holes using two screws (M3x22 or longer) and washer.

Display and operating elements**Output LED**

The yellow LED ON indicates that the NO output status is closed.

Stability /Error LED

If the green LED lights up, the sensor is operating stabil (stability condition). If the green LED flashes, ther is an error (Error indicator).

Teach-In

The sensor has a Teach-In button for easy adjustment.

Adjustment**Teach-In**

The sensor uses a Teach-In technology that allows a rapid and safe self-teaching of the product.

Two different teaching possibilities are available:

- Standard teaching:
Press the Teach-In pushbutton for about 2 s.
- Fine detection (this should be used only in particularly critical conditions. This teaching procedure is used only when the Standard Teach-In is not sufficient.):
Press the Teach-In pushbutton for more than 3 s.

Note: To set correctly the sensor, the background or object to be suppressed has to be present during self-setting.

Standard detection

1. Place the background or the object to be suppressed inside the operating range.
2. Press the SET pushbutton for about 2 s until the Stability LED turns OFF.
3. Release the SET pushbutton and wait for the Stability LED to turn green.

The sensor is now ready to detect all objects in the set range distinguishing them from the suppressed background.

Fine detection

1. Place the background or the object to be suppressed inside the operating range.
2. Press the SET pushbutton > 3 s and keep it pressed until the Stability LED turns OFF and then begins to blink green.

The sensor in this case makes a fine setting and is ready to detect with better precision objects different from the background.

Technical Data**Optical**

Functional principle diffuse reflective with background suppression

Operating mode light mode on NO output / dark mode on NC output

Range (typical values)
BOS 18KW-... 50...100 mm
BOS 18KF-... 50...150 mm

Emission type LED red light (630 nm)

Electrical

Supply voltage 10...30 V DC

Ripple ≤ 2 Vpp

Current < 30 mA

consumption (output current excluded)

Outputs NO and NC; PNP or NPN depending on the variant (short-circuit protection)

Output current ≤ 100 mA

Voltage drop ≤ 2 V

Response time 1 ms

Switching frequency 500 Hz

Mechanical

Connection type 2 m cable Ø 4 mm or M12 connector, 4-pin

Housing material PBT

Lens material PMMA

Weight 75 g. max. cable version / 25 g. max. connector version

Setting Teach-In pushbutton

Displays

Output indicator yellow LED

Stability indicator green LED lights up

Error indicator green LED flashes

Ambient

Ambient light according to IEC 60947-5-2

Ambient temperature -25...+55 °C

Storage temperature -25...+70 °C

Enclosure rating IP67

