

# Fiber-Optic Cable Sensor

## UF55VC/TCH

Part Number



- Adaptable for glass fiber-optic cables: reflex and through-beam mode
- Adjustable time delay
- Can be set for NC or NO operation
- Switching frequency: 20 kHz

These sensors are equipped for use with glass fiber optic cables but can be used with or without one. The transmitter and receiver are located in a single housing. The sensor evaluates transmitted light reflected back from the object and the output is switched as soon as an object passes the selected range. Bright objects reflect more light than dark objects, and can thus be recognized from greater distances.




### Technical Data


Optical Data	
Range	500 mm
Switching Hysteresis	< 15 %
Light Source	Infrared Light
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Opening Angle	12 °
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U <sub>b</sub> = 24 V)	< 40 mA
Switching Frequency	20 kHz
Response Time	25 μs
On-/Off-Delay	0...1 s
Temperature Drift	< 10 %
Temperature Range	-10...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
NPN Switching Output/Switching Current	200 mA
Residual Current Switching Output	< 50 μA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Mechanical Data	
Setting Method	Potentiometer
Housing Material	CuZn, nickel-plated
Full Encapsulation	yes
Degree of Protection	IP65
Connection	Cable, 3-wire, 2 m
PNP NO/NPN NC switchable	●
Connection Diagram No.	<b>810</b>
Control Panel No.	<b>F3</b>   <b>Fo2</b>
Suitable Mounting Technology No.	<b>130</b>
Suitable Fiber-Optic Cable Adapter No.	<b>01</b>

### Complementary Products


Glass Fiber-Optic Cable

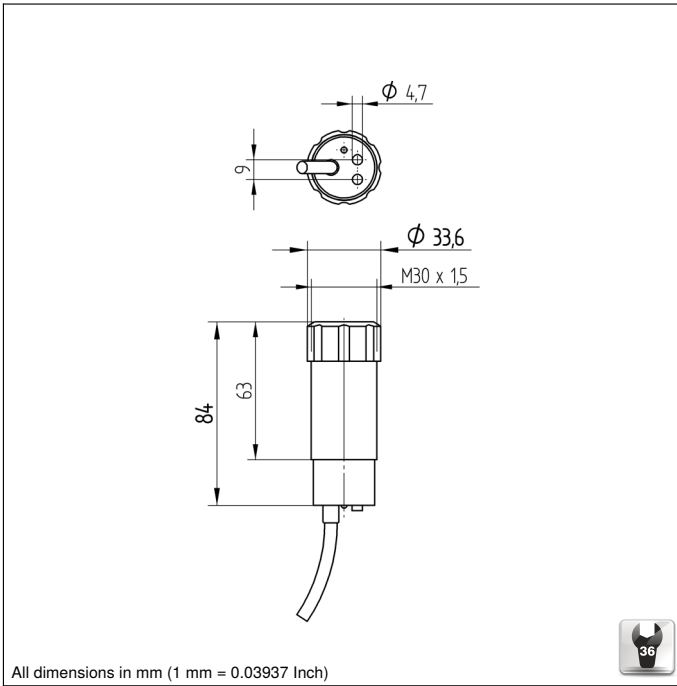

### Ctrl. Panel Optic



- 01 = Switching Status Indicator
- 05 = Switching Distance Adjuster
- 08 = NO/NC Switch
- 10 = ON-Delay/OFF-Delay Switch
- 11 = ON-Delay/OFF-Delay Adjuster

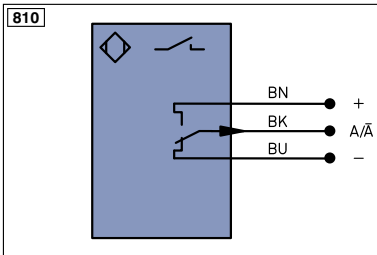

### Legend

+	Supply Voltage +	PT	Platinum measuring resistor	EN <sup>A</sup> EN <sup>B</sup> EN <sup>A</sup> EN <sup>B</sup>	Encoder A/A (TTL)
-	Supply Voltage 0 V	nc	not connected	EN <sup>B</sup> EN <sup>A</sup> EN <sup>B</sup> EN <sup>A</sup>	Encoder B/B (TTL)
~	Supply Voltage (AC Voltage)	U	Test Input	EN <sup>A</sup> EN <sup>B</sup>	Encoder A
A	Switching Output (NO)	U	Test Input inverted	EN <sup>B</sup> EN <sup>A</sup>	Encoder B
Ā	Switching Output (NC)	W	Trigger Input	A <sub>MIN</sub> A <sub>MAX</sub> A <sub>OK</sub>	Digital output MIN
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input	A <sub>MAX</sub> A <sub>OK</sub>	Digital output MAX
ṽ	Contamination/Error Output (NC)	O	Analog Output	A <sub>OK</sub>	Digital output OK
E	Input (analog or digital)	O-	Ground for the Analog Output	SY <sub>in</sub> SY <sub>OUT</sub>	Synchronization In
T	Teach Input	BZ	Block Discharge	SY <sub>OUT</sub>	Synchronization OUT
Z	Time Delay (activation)	AWV	Valve Output	OL <sub>T</sub>	Brightness output
S	Shielding	a	Valve Control Output +	M	Maintenance
RxD	Interface Receive Path	b	Valve Control Output 0 V	rsv	reserved
TxD	Interface Send Path	SY	Synchronization	Wire Colors according to DIN IEC 757	
RDY	Ready	SY-	Ground for the Synchronization	BK	Black
GND	Ground	E+	Receiver-Line	BN	Brown
CL	Clock	S+	Emitter-Line	RD	Red
E/A	Output/Input programmable	±	Grounding	OG	Orange
	IO-Link	S <sub>n</sub> R	Switching Distance Reduction	YE	Yellow
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path	GN	Green
IN	Safety Input	Tx+/-	Ethernet Send Path	BU	Blue
OSSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
Signal	Signal Output	L <sub>a</sub>	Emitted Light disengageable	GY	Grey
Bl_D+/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation	WH	White
EN <sup>0</sup> EN <sup>A</sup> EN <sup>B</sup>	Encoder 0-pulse 0-0 (TTL)	RES	Input confirmation	PK	Pink
		EDM	Contactur Monitoring	GNYE	Green/Yellow

