



**Model Number**

**OBE40M-R201-S2EP-IO-V1-L**

Laser thru-beam sensor  
with 4-pin, M12 x 1 connector


**Features**

- Medium design with versatile mounting options
- DuraBeam Laser Sensors - durable and employable like an LED
- IO-link interface for service and process data
- Various frequencies for avoiding mutual interference (cross-talk immunity)
- Extended temperature range -40°C ... 60°C
- High degree of protection IP69K


**Product information**

The optical sensors in the series are the first devices to offer an end-to-end solution in a medium-sized standard design—from the thru-beam sensor through to the measuring distance sensor. As a result of this design, the sensors are able to perform practically all standard automation tasks. The entire series enables sensors to communicate via IO-Link. The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor. Multi Pixel Technology (MPT) ensures that the standard sensors are flexible and can be adapted to the application environment.


**Dimensions**

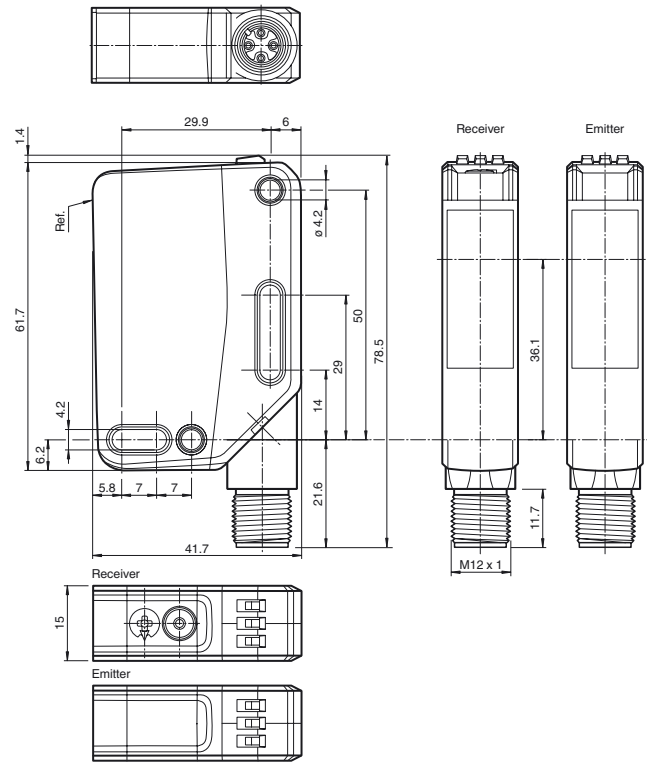


**Electrical connection emitter**



**Electrical connection receiver**



**Pinout**




Wire colors in accordance with EN 60947-5-2

- 1 | BN (brown)
- 2 | WH (white)
- 3 | BU (blue)
- 4 | BK (black)

Release date: 2019-02-11 11:03 Date of issue: 2019-10-31 301133\_eng.xml


**Indicators/operating means**

**Emitter**




|   |                     |
|---|---------------------|
| 1 | Operating indicator |
|---|---------------------|

**Receiver**



|   |                                      |  |
|---|--------------------------------------|--|
| 1 | Sensitivity adjustment               |  |
| 2 | Light-on / dark-on changeover switch |  |
| 3 | Operating indicator / dark on        |  |
| 4 | Signal indicator                     |  |
| 5 | Operating indicator / light on       |  |

**Laserlabel**

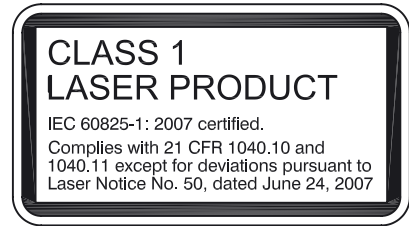

**Accessories**

**IO-Link-Master02-USB**

IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection

**V1-G-2M-PUR**

Female cordset, M12, 4-pin, PUR cable

**V1-W-2M-PUR**

Female cordset, M12, 4-pin, PUR cable

**OMH-RL31-02**

Mounting bracket narrow

**OMH-RL31-03**

Mounting bracket narrow

**OMH-RL31-04**

Mounting aid for round steel  $\varnothing$  12 mm or sheet 1.5 mm ... 3 mm

**OMH-RL31-07**

Mounting bracket including adjustment

**OMH-R20x-Quick-Mount**

Quick mounting accessory

Other suitable accessories can be found at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)

Release date: 2019-02-11 11:03 Date of issue: 2019-10-31 301133\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

**Technical data****System components**

|          |                         |
|----------|-------------------------|
| Emitter  | OBE40M-R201-S-IO-V1-L   |
| Receiver | OBE40M-R201-2EP-IO-V1-L |

**General specifications**

|                            |   |
|----------------------------|---|
| Effective detection range  | 0 ... 40 m  |
| Threshold detection range  | 50 m  |
| Light source               | laser diode   |
| Light type                 | modulated visible red light   |
| Laser nominal ratings      |   |
| Note                       | LASER LIGHT , DO NOT STARE INTO BEAM  |
| Laser class                | 1   |
| Wave length                | 680 nm  |
| Beam divergence            | > 5 mrad ; d63 < 2 mm in the range of 250 mm ... 750 mm   |
| Pulse length               | 1.6 µs  |
| Repetition rate            | max. 17.6 kHz   |
| max. pulse energy          | 9.6 nJ  |
| Alignment aid              | LED red (in receiver lens)<br>illuminated constantly: beam is interrupted,<br>flashes: reaching switching point,<br>off: sufficient stability control |
| Diameter of the light spot | approx. 80 mm at a distance of 40 m   |
| Angle of divergence        | approx. 0.12 °  |
| Ambient light limit        | EN 60947-5-2 : 40000 Lux  |

**Functional safety related parameters**

|                                |       |
|--------------------------------|-------|
| MTTF <sub>d</sub>              | 440 a |
| Mission Time (T <sub>M</sub> ) | 20 a  |
| Diagnostic Coverage (DC)       | 60 %  |

**Indicators/operating means**

|                     |  |
|---------------------|--|
| Operation indicator | LED green:<br>constantly on - power on<br>flashing (4Hz) - short circuit<br>flashing with short break (1 Hz) - IO-Link mode                |
| Function indicator  | Yellow LED:<br>Permanently lit - light path clear<br>Permanently off - object detected<br>Flashing (4 Hz) - insufficient operating reserve |
| Control elements    | Receiver: light/dark switch  |
| Control elements    | Receiver: sensitivity adjustment   |

**Electrical specifications**

|                        |                |   |
|------------------------|----------------|---|
| Operating voltage      | U <sub>B</sub> | 10 ... 30 V DC  |
| Ripple                 |                | max. 10 %   |
| No-load supply current | I <sub>0</sub> | Emitter: ≤ 13 mA<br>Receiver: ≤ 15 mA at 24 V Operating voltage |
| Protection class       |                | III   |

**Interface**

|                             |   |
|-----------------------------|---|
| Interface type              | IO-Link ( via C/Q = pin 4 )   |
| Device profile              | Identification and diagnosis<br>Smart Sensor:<br>Receiver: type 2.4<br>Emitter: -   |
| Transfer rate               | COM 2 (38.4 kBaud)  |
| IO-Link Revision            | 1.1   |
| Min. cycle time             | 2.3 ms  |
| Process data width          | Emitter:<br>Process data input: 0 bit<br>Process data output: 1 bit<br>Receiver:<br>Process data input: 2 bit<br>Process data output: 2 bit |
| SIO mode support            | yes   |
| Device ID                   | Emitter: 0x111412 (1119250)<br>Receiver: 0x111312 (1118994)   |
| Compatible master port type | A   |

**Input**

|            |   |
|------------|---|
| Test input | emitter deactivation at +U <sub>B</sub> |
|------------|---|

**Output**



|                   |   |
|-------------------|---|
| Switching type    | The switching type of the sensor is adjustable. The default setting is:<br>C/Q - Pin4: NPN normally open / dark-on, PNP normally closed / light-on, IO-Link<br>/Q - Pin2: NPN normally closed / light-on, PNP normally open / dark-on |
| Signal output     | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected  |
| Switching voltage | max. 30 V DC  |
| Switching current | max. 100 mA , resistive load  |
| Usage category    | DC-12 and DC-13   |
| Voltage drop      | U <sub>d</sub> ≤ 1.5 V DC   |

Release date: 2019-02-11 11:03 Date of issue: 2019-10-31 301133\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

|                                   |   |  |
|-----------------------------------|---|--|
| Switching frequency               | f | 1250 Hz  |
| Response time                     |   | 0.4 ms   |
| <b>Conformity</b>                 |   |  |
| Communication interface           |   | IEC 61131-9  |
| Product standard                  |   | EN 60947-5-2   |
| Laser safety                      |   | EN 60825-1:2014  |
| <b>Ambient conditions</b>         |   |  |
| Ambient temperature               |   | -40 ... 60 °C (-40 ... 140 °F)   |
| Storage temperature               |   | -40 ... 70 °C (-40 ... 158 °F)   |
| <b>Mechanical specifications</b>  |   |  |
| Housing width                     |   | 15 mm  |
| Housing height                    |   | 61.7 mm  |
| Housing depth                     |   | 41.7 mm  |
| Degree of protection              |   | IP67 / IP69 / IP69K  |
| Connection                        |   | 4-pin, M12 x 1 connector, 90° rotatable  |
| Material                          |   |  |
| Housing                           |   | PC (Polycarbonate)   |
| Optical face                      |   | PMMA   |
| Mass                              |   | Emitter: approx. 47 g receiver: approx. 47 g   |
| <b>Approvals and certificates</b> |   |  |
| UL approval                       |   | E87056 , cULus Listed , class 2 power supply , type rating 1   |
| CCC approval                      |   | CCC approval / marking not required for products rated ≤36 V   |
| FDA approval                      |   | IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007 |

**Curves/Diagrams**

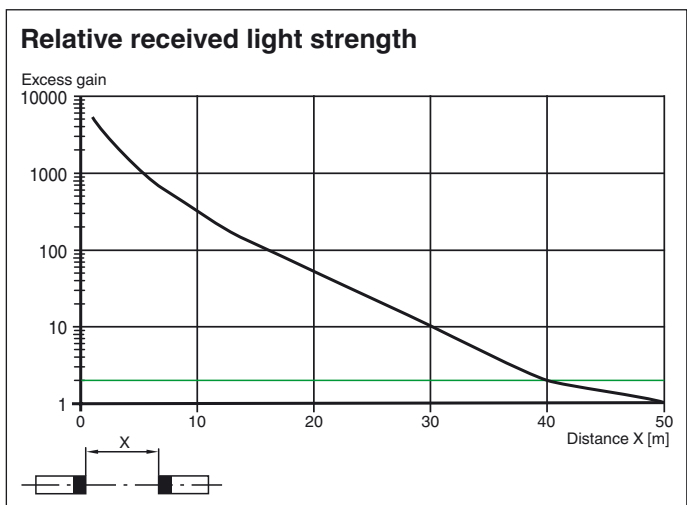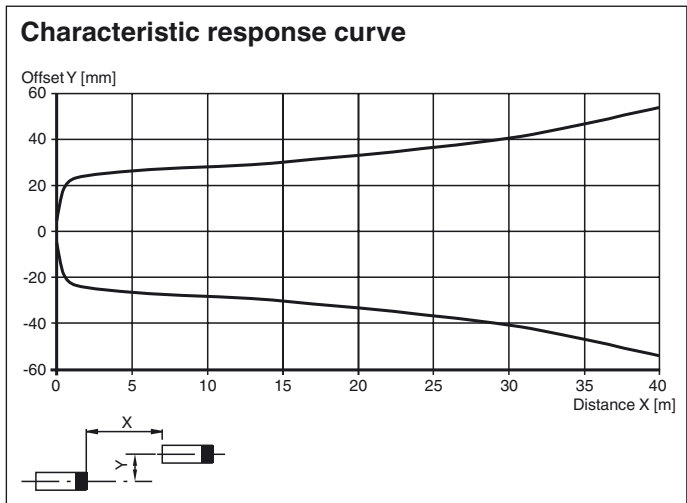

**Functions and Operation**

To unlock the adjustment functions turn the sensing range /sensitivity adjuster for more than 180 degrees.

Release date: 2019-02-11 11:03 Date of issue: 2019-10-31 301133\_eng.xml

### Sensing Range / Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range / sensitivity adjuster counter clockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

### Light-on / Dark-on Configuration

Press the light-on / dark-on changeover switch for more than 1 second (less than 4 seconds). The light-on / dark-on mode changes and the operating indicators are activated accordingly.

If you press the light-on / dark-on changeover switch for more than 4 seconds, the light-on / dark-on mode changes back to the original setting. On release of the light-on / dark-on changeover switch the current state is activated.

### Restore Factory Settings

Press the light-on / dark-on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light-on / dark-on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory default settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range / sensitivity adjuster for more than 180 degrees.