



Thru-beam sensor emitter

MD17/115



- Emitter
- Compact, versatile housing
- 360° high visibility LEDs
- 2 m cable length


Thru-beam sensor transmitter, small design, infrared light, 20 m range, cable



Function

The ML17 sensor family offers diverse connection and installation options, which means that it can adapt to the most varied automation tasks. In addition to the usual fitting method using M4 screws, these sensors can also be installed by means of M18 threaded insert. All devices are equipped with a green Power On display and a yellow function display. These displays are arranged in such a way that they are clearly visible from different directions.

Dimensions

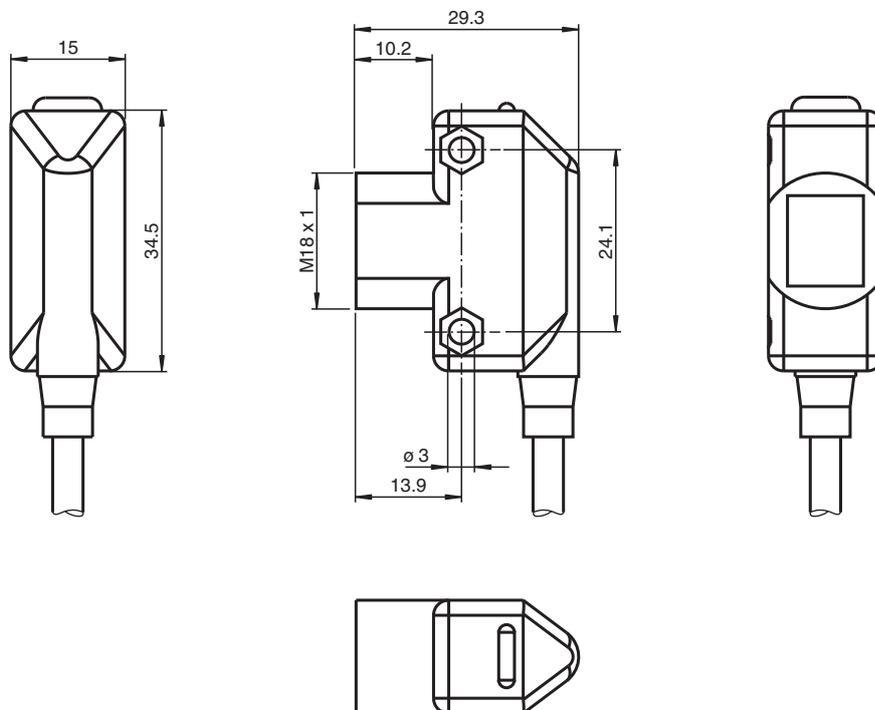

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 908707_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS


Technical Data

System components		
Emitter		MD17/115
Receiver		MV17/115
General specifications		
Effective detection range		0 ... 15 m
Threshold detection range		20 m
Reference target		receiver
Light source		IRED
Light type		Infrared LED
Ambient light limit		≤ 10000 Lux
Indicators/operating means		
Operation indicator		LED green
Electrical specifications		
Operating voltage	U_B	10 ... 30 V DC , class 2
Ripple		max. 10 %
No-load supply current	I_0	< 25 mA
Operating current	I_B	
Time delay before availability	t_v	≤ 200 ms
Conformity		
Product standard		EN 60947-5-2 IEC 60947-5-2
Approvals and certificates		
CE conformity		CE
UL approval		cULus
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-20 ... 55 °C (-4 ... 131 °F)
Storage temperature		-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications		
Housing width		15 mm
Housing height		34.5 mm
Degree of protection		IP67
Connection		2 m fixed cable
Material		
Housing		ABS
Optical face		Acrylic
Mass		40 g

Connection




Indication

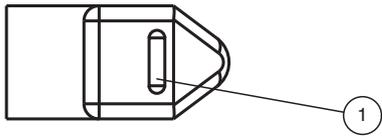


1 Operating display green

Characteristic Curve

Characteristic response curve

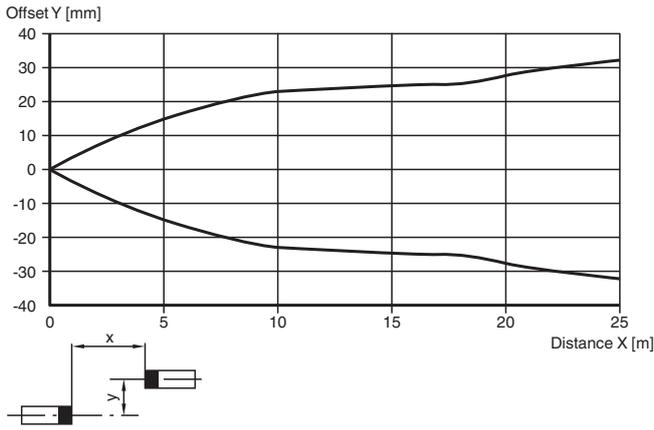

Relative received light strength

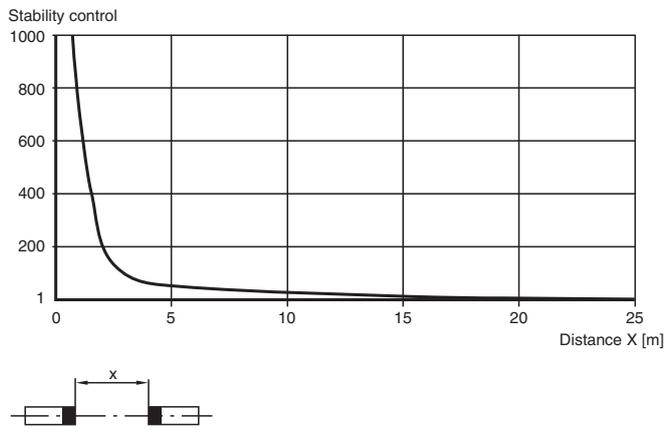

Accessories

	OMH-ML17	Mounting bracket
	OMH-ML17-1	Mounting bracket

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 908707_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".