

- Mechanically rugged: no wearing parts, long operating life, maintenance-free
- RS-485 interface
- Non-contact positioning on Data Matrix code tape
- Noncontact positioning with Data Matrix TAGs
- Reading of Data Matrix control codes
- Infrared light

CE UK
CA

[illegible]

Passage speed	v	≤ 8 m/s
Measuring range		max. 10000 m
Light type		Integrated LED lightning , infrared
Scan rate		40 s ⁻¹
Latency		50 ms
Read distance		150 mm
Depth of focus		± 30 mm
Reading field		170 mm x 105 mm
Ambient light limit		100000 Lux

Technical Data


Accuracy		± 0.2 mm
Nominal ratings		
Camera		
Type		CMOS , Global shutter
Processor		
Clock pulse frequency		600 MHz
Speed of computation		4800 MIPS
Functional safety related parameters		
MTTF _d		86 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
LED indication		7 LEDs (communication, alignment aid, status information)
Electrical specifications		
Operating voltage	U _B	15 ... 30 V DC , PELV
No-load supply current	I ₀	max. 200 mA
Power consumption	P ₀	3 W
Interface		
Interface type		RS 485 interface
Data output code		binary code
Transfer rate		38400 ... 230400 Bit/s
Termination		Switchable terminal resistor
Query cycle time		≥ 10 ms
Input		
Input type		1 to 3 functional inputs , programmable
Input impedance		≥ 27 kΩ
Output		
Output type		1 to 3 switch outputs , PNP , programmable , short-circuit protected
Switching voltage		Operating voltage
Switching current		150 mA each output
Standard conformity		
Emitted interference		EN 61000-6-4:2007+A1:2011
Noise immunity		EN 61000-6-2:2005
Shock resistance		EN 60068-2-27:2009
Vibration resistance		EN 60068-2-6:2008
Approvals and certificates		
UL approval		cULus Listed, General Purpose, Class 2 Power Source, Type 1 enclosure
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Operating temperature		0 ... 60 °C (32 ... 140 °F) , -20 ... 60 °C (-4 ... 140 °F) (noncondensing; prevent icing on the lens!)
Storage temperature		-20 ... 85 °C (-4 ... 185 °F)
Relative humidity		90 % , noncondensing
Mechanical specifications		
Connection type		8-pin, M12 x 1 connector
Housing width		70 mm
Housing height		70 mm
Housing depth		50 mm
Degree of protection		IP67
Material		
Housing		PC/ABS
Mass		approx. 160 g
Factory settings		

Release date: 2022-12-02 Date of issue: 2022-12-02 Filename: 277208_eng.pdf


Technical Data

X resolution (protocol)	1 mm
Y resolution (protocol)	1 mm
Speed resolution (protocol)	0.1 m/s
Angle resolution	1 °
Baud rate	115200 Bit/s
Extrapolation	On
Read head address	0

Connection

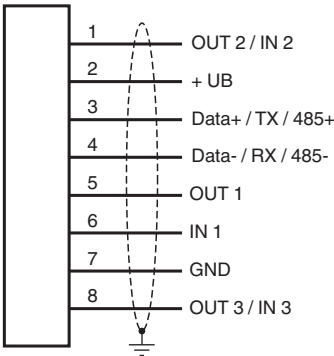


Connection Assignment





Characteristic Curve

Coordinates

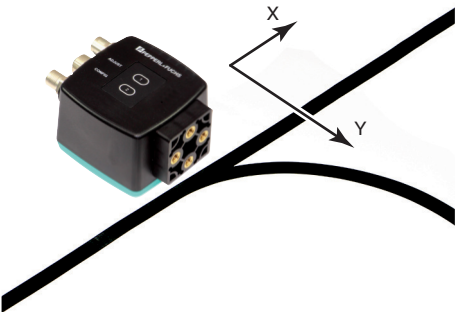

Release date: 2022-12-02 Date of issue: 2022-12-02 Filename: 277208_eng.pdf

Characteristic Curve

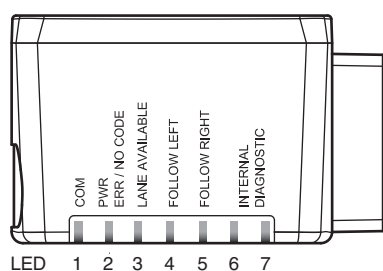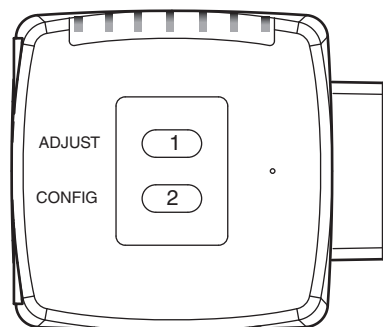

Matching System Components

	PGV*-CA25-*	Data Matrix code tape
	PGV*-CC25-*	Control code tape für PGV System
	PGV85-CT4	Data Matrix tag for PGV system

Accessories

	PCV-USB-RS485-Converter Set	USB to RS 485 interface converter
	PCV-KBL-V19-STR-RS485	Cable unit with power supply for USB / RS-485 interface converter
	V19-G-ABG-PG9	Female connector M12 straight A-coded 8-pin, for cable diameter 5 - 8 mm, shielded, field-attachable
	V19-G-ABG-PG9-FE	Female connector, M12, 8-pin, shielded, field attachable
	PCV-SC12	Grounding clip for PCV system
	PCV-AG100	Alignment guide for PCV100-* read head
	PCV-LM25	Marker head for 25 mm code tape

Accessories

	PCV-MB1	Mounting bracket for PCV* read head
	Vision Configurator	Operating software for camera-based sensors
	VAZ-V1S-B	Blind plug for M12 sockets
	PGV25M-CD100-CLEAR	Protective laminate for PGV code tape
	PGV25M-CD120-CLEAR	Protective laminate for PGV code tape
	PGV25M-CD160-CLEAR	Protective laminate for PGV code tape