



### Model Number

**OBD8000-R300-2P1-V1-L**

Diffuse mode sensor  
with 4-pin, M12 x 1 connector


### Features

- Extremely long detection range paves the way for new applications
- Pulse Ranging Technology (PRT)
- Visible light source for easy alignment
- Minimal black-white difference
- Switch point adjustment with quick twist
- Absolutely reliable background suppression


### Product information

The sensors in the R300 series represent a versatile product line and adopt various functional principles. All sensors operate using proven Pulse Ranging Technology (PRT) and are characterized by high sensing ranges and detection ranges. Contained within the compact housing of the 28 series of light barriers, the R300 offers all of the properties of PRT such as maximum reliability when detecting objects and immunity against ambient light and cross-talk. To achieve this, the sensors in the R300 series make use of a number of different kinds of measurement data. What's more, the sensors are equipped with red light that is safe for the human eye as standard, making it easier to align the devices, even across expansive work areas. These features, combined with an innovative and intuitive operating concept, provide solutions for conventional automation tasks delivering the highest level of performance.


### Dimensions

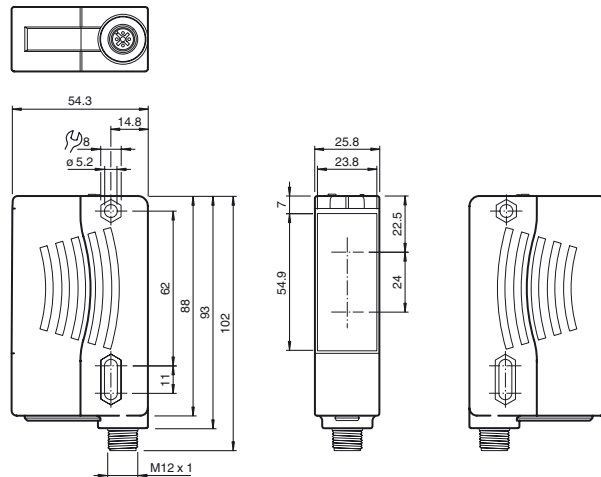

### Electrical connection




### Pinout



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

### Indicators/operating means

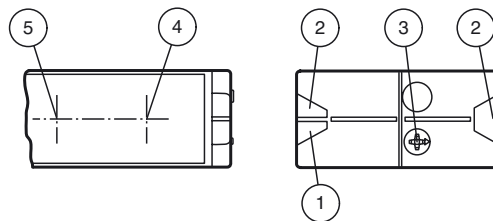

1	Operating indicator	green
2	Signal indicator	yellow
3	Sensing range adjuster	
4	Emitter	
5	Receiver	

## Technical data

### General specifications

Detection range	0.03 ... 8 m
Adjustment range	0.05 ... 8 m
Reference target	Kodak white (90%)
Light type	modulated visible red light
<b>Laser nominal ratings</b>	
Note	LASER LIGHT , DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS
Laser class	1M
Wave length	660 nm
Beam divergence	< 25 mrad
Pulse length	4 ns
Repetition rate	250 kHz
max. pulse energy	< 2.4 nJ
Black/White difference (6 %/90 %)	< 0.5 %
Angle deviation	max. ± 2°
Measuring method	Pulse Ranging Technology (PRT)
Diameter of the light spot	vertical 60 mm , horizontal 30 mm at a distance of 2 m
Ambient light limit	50000 Lux

### Functional safety related parameters

MTTF <sub>d</sub>	100 a
Mission Time (T <sub>M</sub> )	10 a
Diagnostic Coverage (DC)	0 %

### Indicators/operating means

Operation indicator	LED green
Function indicator	2 LEDs yellow for switching state
Control elements	Teach-In key

### Electrical specifications

Operating voltage	U <sub>B</sub>	10 ... 30 V DC
Ripple		10 % within the supply tolerance
No-load supply current	I <sub>0</sub>	≤ 80 mA / 24 V DC
Time delay before availability	t <sub>v</sub>	< 0.7 s , for temperatures <-30°C compliance of the specification 5 mins after power on

### Output

Switching type	Q - Pin4: NPN normally closed / dark-on, PNP normally open / light-on /Q - Pin2: NPN normally open / light-on, PNP normally closed / dark-on		
Signal output	2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected		
Switching voltage	max. 30 V DC		
Switching current	max. 100 mA		
Switching frequency	f	50 Hz	
Response time	5 ms		

### Conformity

Product standard	EN 60947-5-2
Laser safety	EN 60825-1:2014

### Ambient conditions

Ambient temperature	-40 ... 55 °C (-40 ... 131 °F)
Storage temperature	-40 ... 70 °C (-40 ... 158 °F)


### Mechanical specifications

Housing width	25.8 mm
Housing height	88 mm
Housing depth	54.3 mm
Degree of protection	IP67
Connection	4-pin, M12 x 1 connector
Material	
Housing	Plastic ABS
Optical face	PMMA
Mass	90 g

### Approvals and certificates

UL approval	E87056 , cULus Listed , class 2 power supply , type rating 1
FDA approval	IEC 60825-1:2014 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007

## Laserlabel



## Accessories

### OMH-05

Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm

### OMH-21

Mounting bracket

### OMH-22

Mounting bracket

### OMH-RLK29-HW

Mounting bracket for rear wall mounting

### OMH-K01

dove tail mounting clamp

### OMH-K03

dove tail mounting clamp

### OMH-VDM28-01

Metal enclosure for inserting protective panes or apertures

### OMH-VDM28-02


Mounting and fine adjustment device for sensors from the 28 series

### OMH-07-01

Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm

Other suitable accessories can be found at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)

## Curves/Diagrams

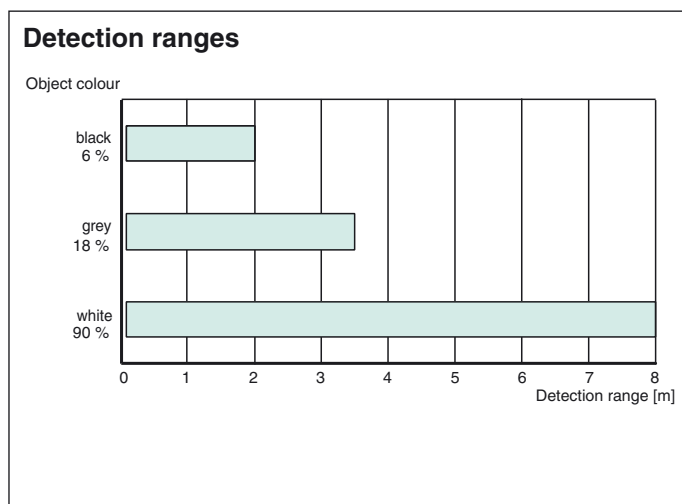

## Intended Use

### Mounting instructions:

The sensor can be mounted directly by means of thru-holes or by using a fixing bracket or mounting clamp (not included in the scope of delivery). Ensure that the surface is level in order to prevent the housing from becoming distorted when the fittings are tightened. It is advisable to secure the nuts and screws using spring disks to prevent the sensor from being misaligned.

### Connection:

Connect the device as set out in the connection diagram.

### Adjustment:

The green LED lights up when the operating voltage is applied.

Adjust the sensor so that the laser point is on the center of the target.

## Installation Note

A pressure equalization membrane is fitted on the sensor nameplate.

When mounting, make sure that the pressure equalization membrane is not sealed off.

## Operating Concept

### Activating the operating function:

Activate the operating function by turning the sensing range adjuster by more than 180°. If no operation takes place within five minutes, the operating function will be deactivated.

### Sensing range adjustment:

To increase the sensing range, turn the sensing range adjuster in a clockwise direction.

To reduce the sensing range, turn the sensing range adjuster in a counterclockwise direction.

To jump directly to the switch point, use the Quick Twist function. This function can be activated by quickly turning the sensing range adjuster. If Quick Twist was successful, the yellow LED will change status.

To make subsequent fine adjustments to the sensing range, turn the sensing range adjuster slowly.

As soon as the scanning range limit has been reached, the green and yellow LEDs will quickly flash alternately (approx. 8 Hz).

## Laser notice laser class 1M

- The irradiation can lead to irritation especially in a dark environment. Do not point at people!
- Caution: laser light, do not observe laser light with optical instruments such as magnifying glasses, microscopes, telescopes or binoculars!
- Maintenance and repairs should only be carried out by authorized service personnel!
- Caution: use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.
- IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007