



**Model Number**

**UB500-F54-U-V15**


Single head system

**Features**

- Analog output 0 ... 10 V
- Measuring window adjustable
- Program input
- Synchronization options
- Deactivation option
- Temperature compensation

**Diagrams**

**Characteristic response curve**

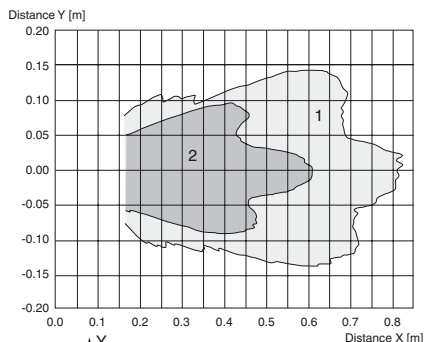

Curve 1: flat surface 100 mm x 100 mm  
Curve 2: round bar, Ø 25 mm

**Technical data**

**General specifications**

Sensing range	30 ... 500 mm
Adjustment range	50 ... 500 mm
Dead band	0 ... 30 mm
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 380 kHz
Response delay	≤ 50 ms

**Indicators/operating means**

LED green	solid green: monitoring system green flashing: program function
LED yellow	solid yellow: object in the evaluation range yellow, flashing: program function, object detected
LED red	flashing: normal mode: error Program function: no object detected permanently: Program mode, object uncertain

**Electrical specifications**

Operating voltage $U_B$	15 ... 30 V DC , ripple 10 %SS
No-load supply current $I_0$	≤ 55 mA

**Input/Output**

Synchronization	1 synchronous input 0 level: $U_B \dots +1 V$ 1 level: $+4 V \dots +U_B$ input impedance: > 12 KOhm synchronization pulse: 0.1 ... 8 ms
-----------------	---

Synchronization frequency	Common mode operation ≤ 100 Hz Multiplex operation ≤ 100 / n Hz, n = number of sensors
---------------------------	---

**Input**

Input type	1 program input lower evaluation limit A1: $-U_B \dots +1 V$ , upper evaluation limit A2: $+4 V \dots +U_B$ input impedance: > 4.7 kΩ, pulse duration: ≥ 1 s
------------	--

**Output**

Output type	1 analog output 0 ... 10 V
Default setting	evaluation limit A1: 50 mm evaluation limit A2: 500 mm
Resolution	0.11 mm
Deviation of the characteristic curve	± 1 % of full-scale value
Repeat accuracy	± 0.1 % of full-scale value
Load impedance	≥ 1 kOhm
Temperature influence	± 1.5 % of full-scale value

**Ambient conditions**

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

**Mechanical specifications**

Connection type	Connector M12 x 1 , 5-pin
Degree of protection	IP65
Material	
Housing	ABS
Transducer	epoxy resin/hollow glass sphere mixture; polyurethane foam
Mass	100 g

**Compliance with standards and directives**


Standard conformity	
Standards	EN 60947-5-2:2007+A1:2012 IEC 60947-5-2:2007 + A1:2012 EN 60947-5-7:2003 IEC 60947-5-7:2003

**Approvals and certificates**


EAC conformity	TR CU 020/2011
UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤36 V

Release date: 2016-08-01 13:42 Date of issue: 2016-08-01 108158\_eng.xml

**Dimensions**

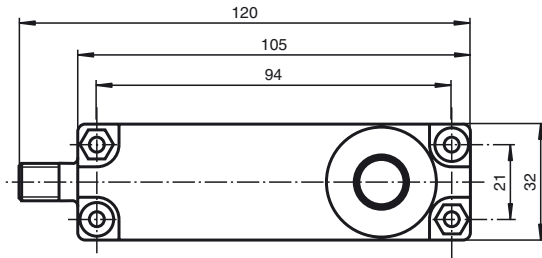


Bore hole and countersinking for screws/hexagon M4

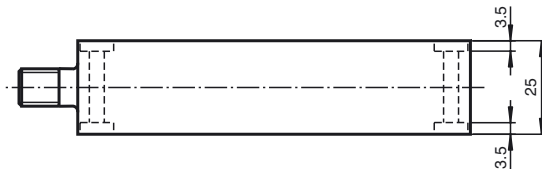


**Electrical Connection**

Standard symbol/Connections:  
(version U)



Core colours in accordance with EN 60947-5-2.

**Pinout**



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)
5	GY	(gray)


**Accessories**

**UB-PROG2**  
Programming unit

**V15-G-2M-PVC**  
Female cordset, M12, 5-pin, PVC cable

**Additional Information**

**Programming the analog output mode**

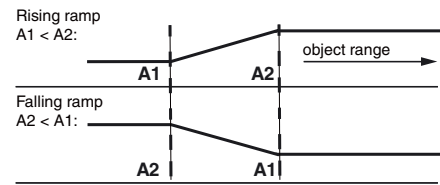

**Synchronisation**

The sensor features a synchronisation input for the suppression of mutual interference. If this input is not used, the sensor will operate using an internally generated clock rate. The synchronisation of multiple sensors can be realised as follows:

**External synchronisation:**

The sensor can be synchronised by the external application of a square wave voltage. A synchronisation pulse at the synchronisation input starts a measuring cycle. The pulse must have a duration greater than 100 µs. The measuring cycle starts with the falling edge of a synchronisation pulse. A low level > 1 s or an open synchronisation input will result in the normal operation of the sensor. A high level at the synchronisation input disables the sensor.

Two operating modes are available:

1. Multiple sensors can be controlled by the same synchronisation signal. The sensors are synchronised.
2. The synchronisation pulses are sent cyclically to individual sensors. The sensors operate in multiplex mode.

**Internal synchronisation:**

The synchronisation connections of up to 5 sensors capable of internal synchronisation are connected to one another. When power is applied, these sensors will operate in multiplex mode.

The response delay increases according to the number of sensors to be synchronised.

Synchronisation cannot be performed during TEACH-IN and vice versa. The sensors must be operated in an unsynchronised manner to teach the evaluation limits.

**Note:**

If the option for synchronisation is not used, the synchronisation input has to be connected to ground (0V) or the sensor has to be operated via a V1 cable connector (4-pin).

**Adjusting the evaluation range (analogue output)**

The ultrasonic sensor has an analogue output with programmable evaluation limits. These are set by applying the supply voltage -U<sub>B</sub> or +U<sub>B</sub> to the TEACH-IN input. The supply voltage must be applied to the TEACH-IN input for at least 1 s. LEDs indicate whether the sensor has recognised the target during the TEACH-IN procedure. The lower evaluation limit A1 is taught with - U<sub>B</sub>, A2 with +U<sub>B</sub>.

Two different output functions can be set:

1. Analogue value increases with rising distance to object (rising ramp)
2. Analogue value falls with rising distance to object (falling rampe)

**TEACH-IN rising ramp (A1 > A2)**

- Position object at lower evaluation limit
- TEACH-IN lower limit A1 with - U<sub>B</sub>
- Position object at upper evaluation limit
- TEACH-IN upper limit A2 with + U<sub>B</sub>

**TEACH-IN falling ramp (A1 > A):**

- Position object at lower evaluation limit
- TEACH-IN lower limit A2 with + U<sub>B</sub>
- Position object at upper evaluation limit
- TEACH-IN upper limit A1 with - U<sub>B</sub>

**LED Displays**

Displays in dependence on operating mode	Red LED	Yellow LED	Green LED
<b>TEACH-IN evaluation limit</b>			
Object detected	off	flashes	flashes
No object detected	flashes	off	flashes
Object uncertain (TEACH-IN invalid)	on	off	flashes
Normal mode (evaluation range)	off	on	on
Fault	flashes	previous state	off

Release date: 2016-08-01 13:42 Date of issue: 2016-08-01 108188\_eng.xml