

Reflex Sensor with Background Suppression

HD12NCT3

Part Number




- Electronic background suppression
- Red light
- Stainless steel housing
- Teach-in, external teach-in

Technical Data


Optical Data	
Range	120 mm
Adjustable Range	35...120 mm
Switching Hysteresis	< 5 %
Light Source	Red Light
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 30 mA
Switching Frequency	750 Hz
Response Time	667 μs
On-/Off-Delay (RS-232)	0...1 s
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
NPN Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Teach Mode	HT, VT
Protection Class	III
Mechanical Data	
Setting Method	Teach-In
Housing Material	Stainless Steel
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4-pin
NPN NO/NC switchable	●
RS-232 with Adapterbox	●
Connection Diagram No.	352
Control Panel No.	D7
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	150

These sensors detect distance by measuring angles. They are particularly good at recognizing objects in front of any background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

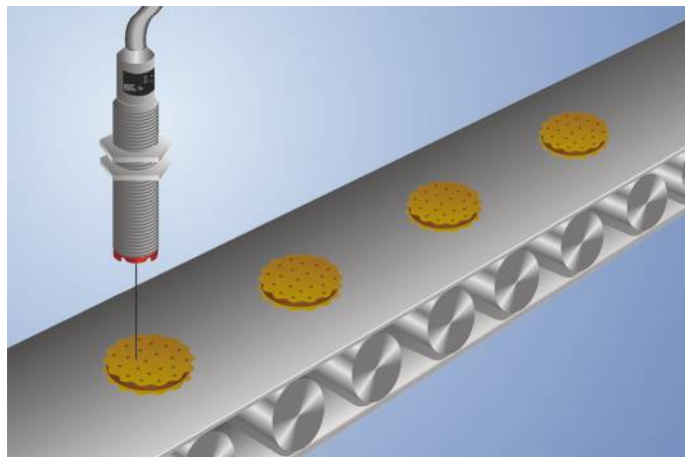


Complementary Products


Adapterbox A232	
Dust Extraction Tube STAUBTUBUS-01	
Software	

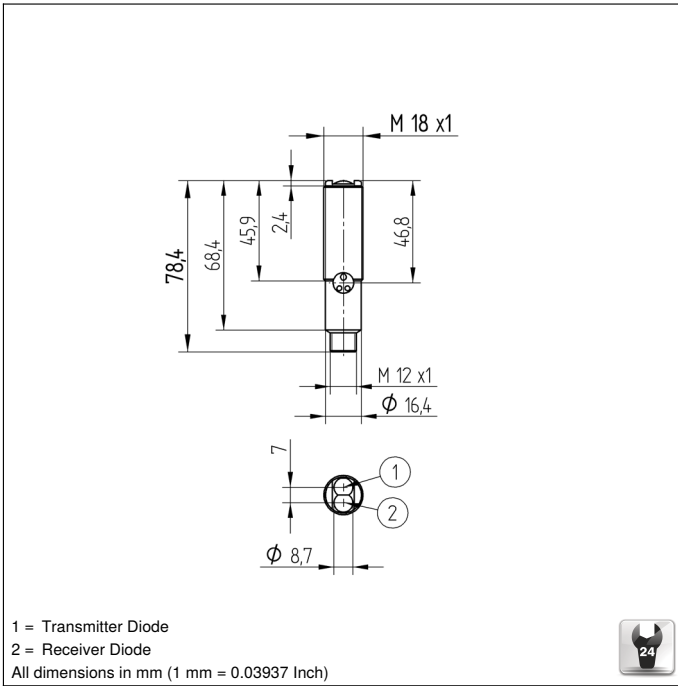

Ctrl. Panel



- 01 = Switching Status Indicator
- 02 = Contamination Warning
- 06 = Teach Button

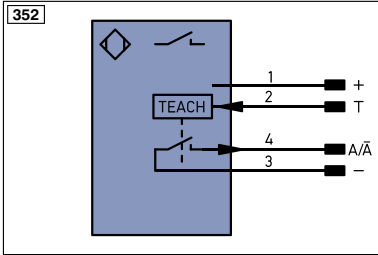


Legend			
+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
~	Supply Voltage (AC Voltage)	U	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
V̄	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	AMV	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	S _n R	Switching Distance Reduction
	IO-Link	Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	L _a	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
Bl_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
EN0 _{RS422}	Encoder 0-pulse 0-0 (TTL)	EDM	Contactur Monitoring
EN _{RS422}	Encoder A/Ā (TTL)		
EN _{RS422}	Encoder B/B̄ (TTL)		
EN _A	Encoder A		
EN _B	Encoder B		
A _{MIN}	Digital output MIN		
A _{MAX}	Digital output MAX		
A _{OK}	Digital output OK		
SY _{in}	Synchronization In		
SY _{OUT}	Synchronization OUT		
OL _T	Brightness output		
M	Maintenance		
rsv	reserved		
Wire Colors according to DIN IEC 757			
BK	Black		
BN	Brown		
RD	Red		
OG	Orange		
YE	Yellow		
GN	Green		
BU	Blue		
VT	Violet		
GY	Grey		
WH	White		
PK	Pink		
GNVE	Green/Yellow		

Table 1

Detection Range	60 mm	120 mm
Light Spot Diameter	2 mm	4 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

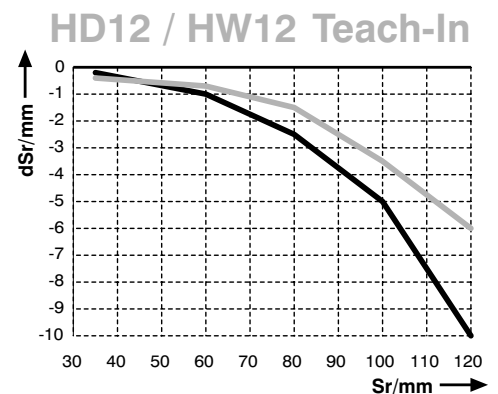

Sr = Switching Distance
dSr = Switching Distance Change

— black 6 % remission
— grey 18 % remission

