
Safety Light Curtain Hand Protection

SG4-30IE135C1



- **Completely integrated electronics**
- Fix blanking, floating blanking and reduced resolution, cascading, muting
- Serial interface

These safety light curtains are distinguished by their compact design. They are also equipped with numerous auxiliary functions, allowing for adaptation to the respective application in a highly individualized fashion. The adequate mounting angle BEF-SET-33 is included in the delivery.

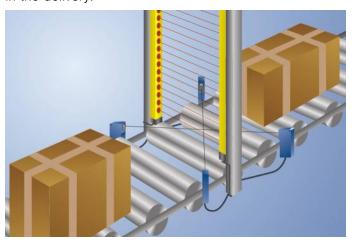

Technical Data

0,520 m 1380 mm
1380 mm
30 mm
Red Light
± 2,5 °
Receiver
24 V DC
300 mA
20,9 ms
-2050 °C
-2570 °C
2
< 2,5 V
300 mA
1
< 2,5 V
200 mA
yes
yes
RS-485
III
Aluminum
Polycarbonate
IP67
M12 × 1; 8-pin
4
4
PL e
3,08 × E-8 1/h
20 a
yes
yes
yes
28
S4
88 88s
700

Suitable Emitter

SG4-30IS135C1


Complementary Products

Laser Alignment Tool SZ0-LAH1 Muting Indicator SM0-00CA000C1 Path-Folding Mirror Z2UG004 Protection Column with Path-Folding Mirror SZ000EU170NN01 Protection Column with Protective Screen SZ000EG170NN01 Safety Relay SG4-00VA000R2, SR4B3B01S, SR4D3B01S


Software

Software wsafe



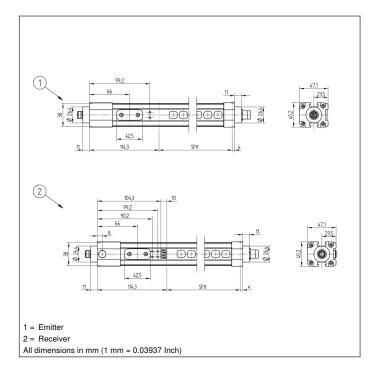

Ctrl. Panel



- 03 = Error Indicator
- 20 = Enter Button
- 52 = OSSD ON
- 53 = OSSD OFF
- 55 = Blanking
- 56 = Dip-Switch
- 60 = Display











