

## CBAS300-T2N-3G12


Mind O≠0, I≠I≠1, S≠5, B≠8.

Operating range	0.9...2 m · 3...6½ ft
Operating voltage	10...35 V <sub>DC</sub>
Current consumption	37 mA
Operating temperature	-20...+55 °C · -3...+132 °F
Cycle time	13.5 ms
Mute input	NPN, >15 mA
IP code	IP 65
Housing material	aluminum, powder-coated
Pane material	PMMA
Quantity of beams	576
Operation indicator	LED green
Connection	PUR cable, 30 cm, M12
Weight	276 g · 9.7 oz
Tariff code	85365019
Complies with	CE, RoHS




**25 months Warranty** Our products are manufactured to stringent ISO 9001 European standards to ensure that our customers only receive the best quality.

Wiring diagram

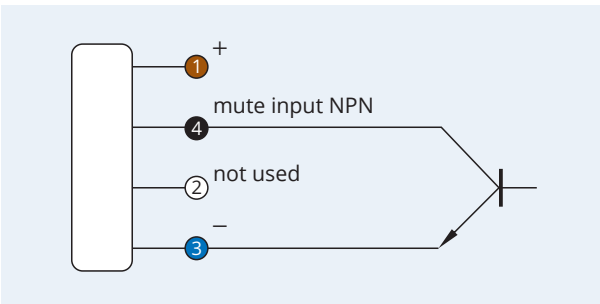


Pinout

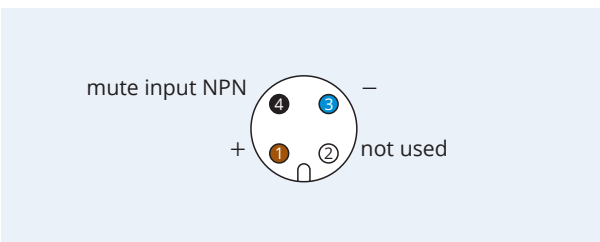

**Caution!** This device shall not be used if the safety of persons rely on its faultless function.

## Crossed-Beam Area Sensor Transmitter

Active zone: 300 mm · Range: 2 m

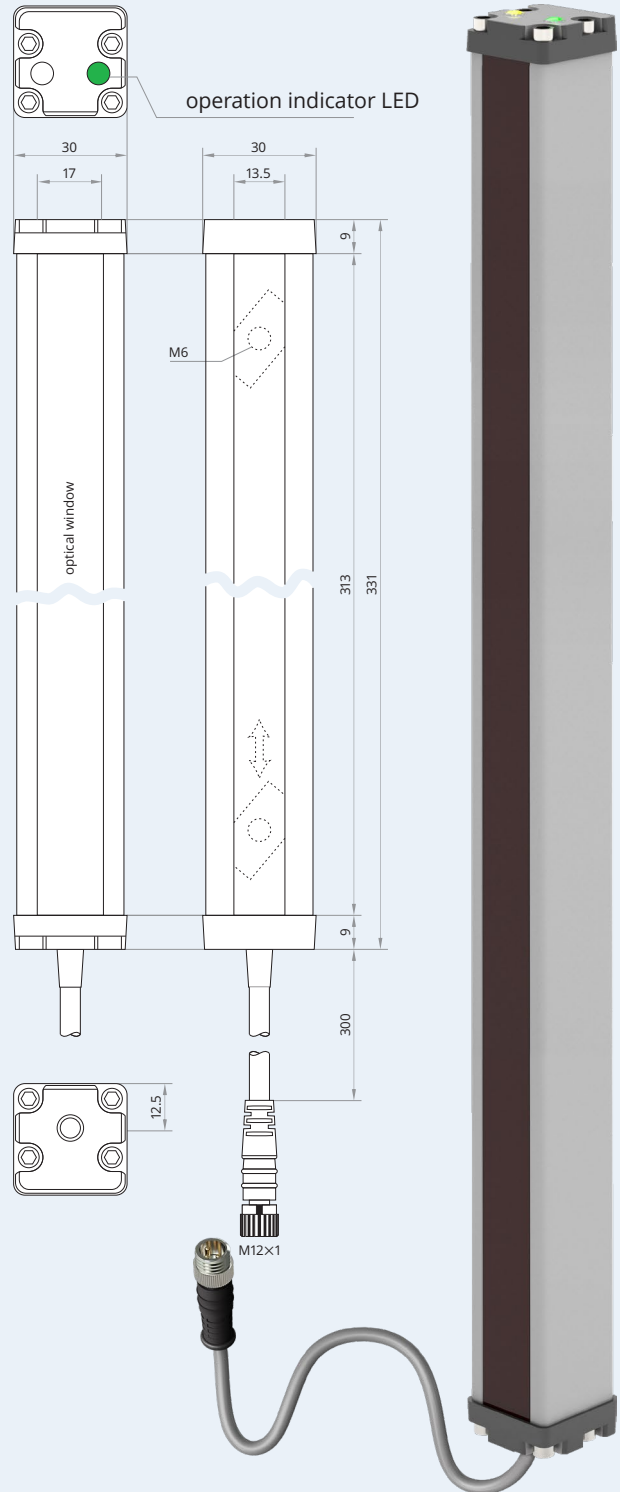

XECRO reserves the right to make minor changes without prior notification.