

CBAS300-T4P-G2P

Mind O≠0, I≠I≠1, S≠5, B≠8.


Operating range	0.9...4 m · 3...13½ ft
Operating voltage	10...35 V _{DC}
Current consumption	37 mA
Operating temperature	-20...+55 °C · -3...+132 °F
Cycle time	13.5 ms
Mute input	PNP, >15 mA
IP code	IP 65
Housing material	aluminum, powder-coated
Pane material	PMMA
Quantity of beams	576
Operation indicator	LED green
Connection	PVC cable, 2 m
Weight	273 g · 9.6 oz
Tariff code	85365019
Complies with	CE, RoHS




Warranty Our products are manufactured to stringent ISO 9001 European standards to ensure that our customers only receive the best quality.



Wiring diagram

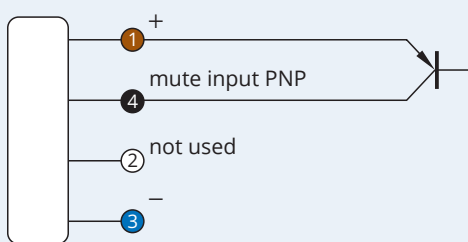


Pinout



Crossed-Beam Area Sensor Transmitter

Active zone: 300 mm · Range: 4 m

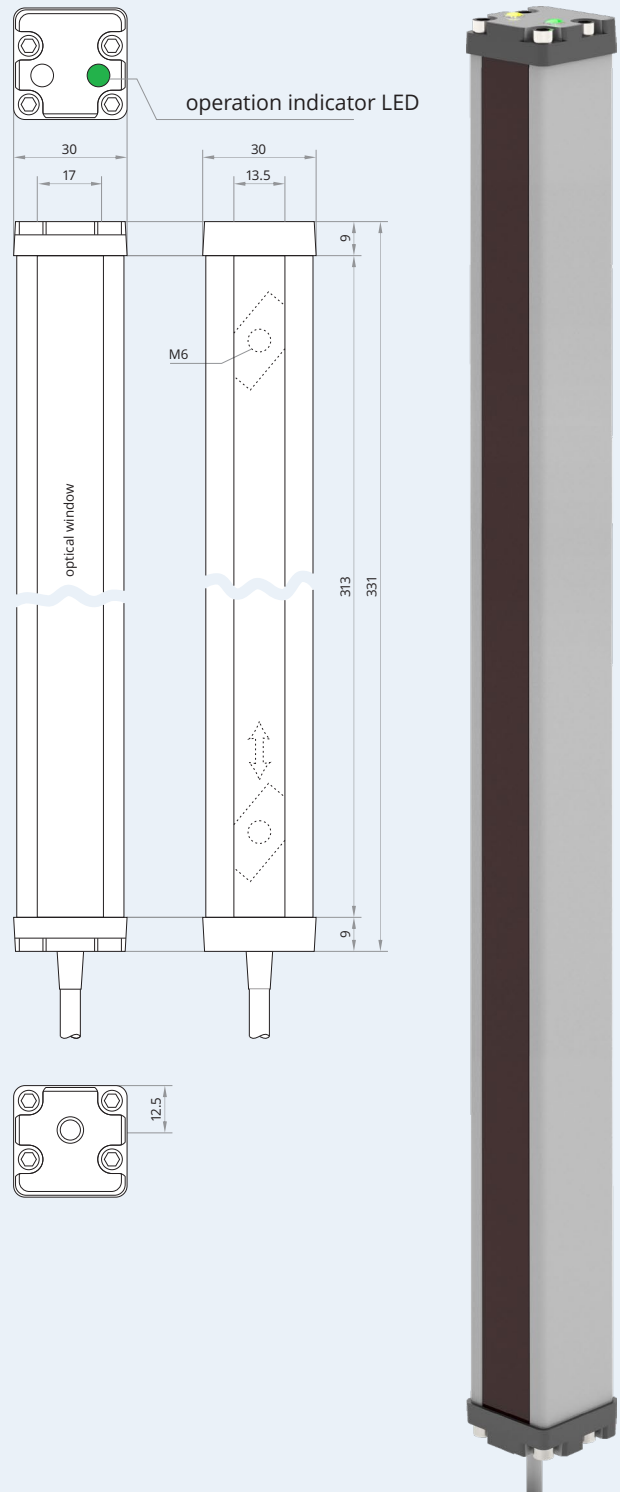

⚠ Caution! This device shall not be used if the safety of persons rely on its faultless function.

XECRO reserves the right to make minor changes without prior notification.