



Model Number

LS682-DA-EN/F1/35/146

Optical data coupler

Features


- Fast Ethernet; Powerlink; EtherCAT; Profinet
- Independent of Ethernet protocol
- Version for low temperature applications
- Plug connection for fast mounting
- No parameterization
- Line indicator for signal strength

Product information


The optical data coupler serves as a connection of Ethernet modules to remote modules. These can move along an axis toward each other. The devices are optimized for conditions in high bay warehouses bays.

The physical transfer takes place protocol-free with 100 MBit/s full duplex. The data rate remains constant irrespective of distance. Telegrams are not saved, which enables immediate transfer.


Dimensions

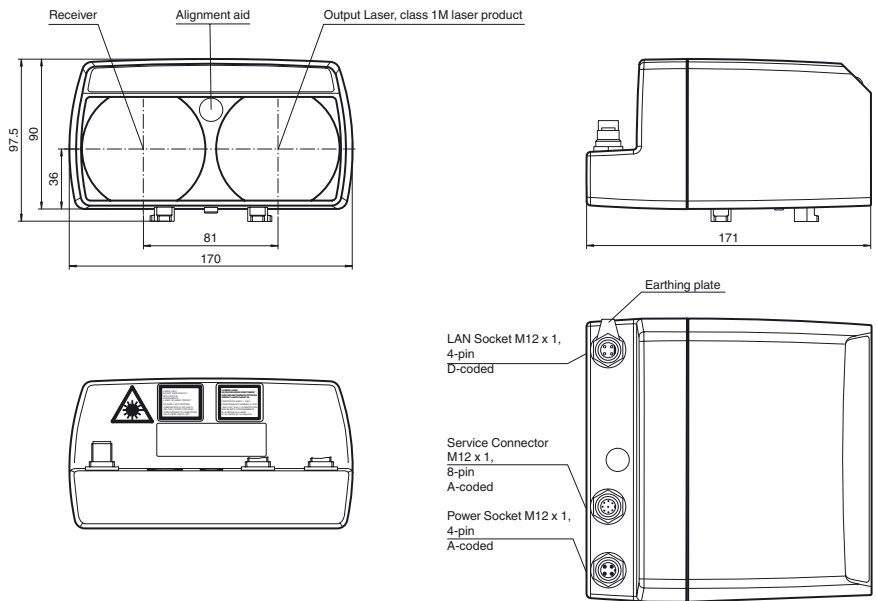

Electrical connection

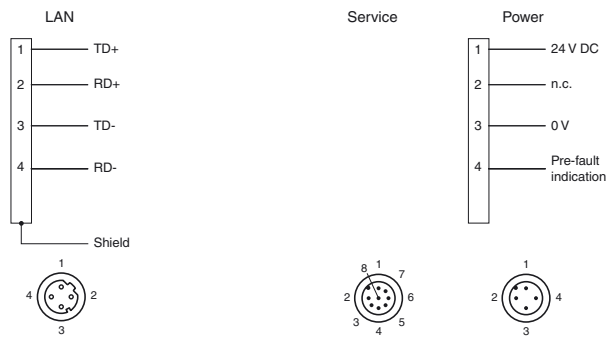

Indicators/operating means

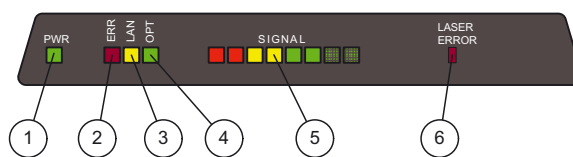

| | | |
|---|---------------------|--------|
| 1 | Operating indicator | green |
| 2 | Failure | red |
| 3 | LAN link | yellow |
| 4 | Opto link | green |
| 5 | Signal quality | |
| 6 | Error Laser | red |

Release date: 2019-04-24 15:46 Date of issue: 2019-04-24 265354_eng.xml

Technical data**General specifications**

| | |
|---------------------------|--------------------------|
| Effective detection range | 0 ... 300 m |
| Threshold detection range | 350 m |
| Light source | laser diode |
| Light type | modulated infrared light |

Laser nominal ratings

Note INVISIBLE LASER RADIATION , DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS

| | |
|------------------------------|------------------------------|
| Laser class | 1M |
| Wave length | 785 nm |
| Beam divergence | 15 mrad |
| Pulse length | 8 ns |
| Repetition rate | 62.5 MHz |
| Maximum optical power output | 60 mW |
| Diameter of the light spot | 1.5 m at a distance of 100 m |
| Angle of divergence | 1 ° |
| Ambient light limit | > 10000 Lux |

Functional safety related parameters

| | |
|--------------------------------|--------|
| MTTF _d | 58.6 a |
| Mission Time (T _M) | 10 a |
| Diagnostic Coverage (DC) | 0 % |

Indicators/operating means

| | |
|---------------------|--|
| Data flow indicator | LED green: OPTO-Link LED yellow: LAN-Link LED red: ERROR |
| Function indicator | Signal strength (8 LED: Red, yellow, green) |

Electrical specifications

| | | |
|------------------------|----------------|----------------------------|
| Operating voltage | U _B | 18 ... 30 V DC |
| No-load supply current | I ₀ | 200 mA |
| Data rate | | 100 MBit/s (Fast Ethernet) |

Interface

| | |
|----------------|-------------|
| Interface type | 100 BASE-TX |
|----------------|-------------|

Output

| | |
|-----------------------------|--|
| Pre-fault indication output | 1 PNP, inactive when falling short of the stability control , short-circuit protected, max. 200 mA |
|-----------------------------|--|

Conformity

| | |
|--------------|-----------------|
| Laser safety | EN 60825-1:2007 |
|--------------|-----------------|

Ambient conditions



| | |
|---------------------|--------------------------------|
| Ambient temperature | -30 ... 50 °C (-22 ... 122 °F) |
| Storage temperature | -40 ... 70 °C (-40 ... 158 °F) |

Mechanical specifications

| | |
|----------------------|----------|
| Degree of protection | IP65 |
| Material | |
| Housing | ABS / PC |
| Optical face | plastic |
| Mass | 700 g |

Approvals and certificates

| | |
|--------------|--|
| UL approval | cULus Listed |
| FDA approval | IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007 |

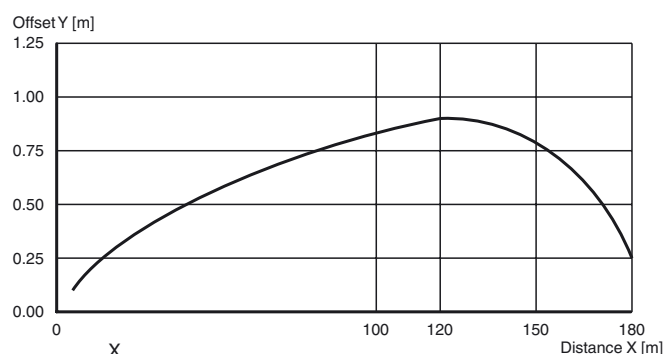Curves/Diagrams**Characteristic response curve****Laserlabel****Accessories****OMH-LS610-01**

Mounting bracket for optical data coupler

OMH-LS610-02

Direct mounting set consisting of 4 x M4 threaded inserts

OMH-LS610-03

Mounting bracket with deviation mirror for optical data coupler

OMH-LS610-05

Mounting bracket for optical data coupler and distance measurement devices

Other suitable accessories can be found at www.pepperl-fuchs.com


Function

The LS682-DA-EN is a device for serial data transfer in Ethernet systems. One F1 and one F2 device is needed for each data transfer link.

Data is transferred in both directions simultaneously by means of modulated light.

Function Displays/Excess Gain

A red alignment LED, which can be seen from a long way off, is located on the front of the device to serve as an alignment aid. As soon as a receiver detects the emitted light of the device opposite it, the flashing frequency of the alignment aid decreases. If the light goes out, this indicates that the devices are aligned with sufficient excess gain. For fine adjustment, the optical data coupler features a bar graph display (signal display) for optimum alignment.

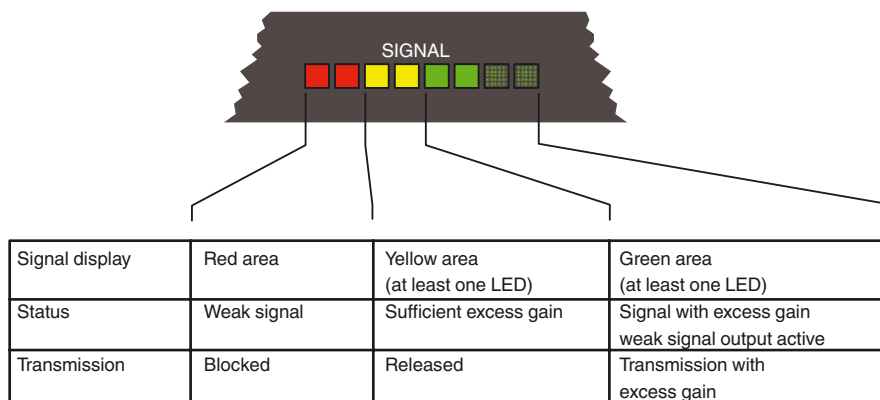

Mounting

The device is mounted using appropriate accessories, e.g., OMH-LS610-01 for wall mounting.

The x-y adjuster is delivered preassembled. It is fixed in the required beam direction ($\pm 90^\circ$ rotation possible) on the mounting bracket.

Laser notice laser class 1M

- The irradiation can lead to irritation especially in a dark environment. Do not point at people!
- Caution: visible and invisible laser radiation, do not observe laser light with optical instruments such as magnifying glasses, microscopes, telescopes or binoculars!
- Maintenance and repairs should only be carried out by authorized service personnel!
- Attach the device so that the warning is clearly visible and readable.
- Caution: use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.