



Model Number

CBN15-F64-A2-1M-V1

Features

- 15 mm non-flush
- Flat housing
- Switching distance adjustable between 2 mm ... 15 mm

Accessories

MH-F64
Mounting base

Technical Data

General specifications

Switching element function		PNP	NO/NC
Rated operating distance	s_n	15 mm	
Installation		non-flush	
Output polarity		DC	
Assured operating distance	s_a	0 ... 10.8 mm	
Actual operating distance	s_r	13.5 ... 16.5 mm	

Nominal ratings

Installation conditions			
B		15 mm	
C		30 mm	
F		45 mm / 60 mm	
Operating voltage	U_B	10 ... 30 V DC	
Switching frequency	f	0 ... 100 Hz	
Hysteresis	H	1 ... 10 typ. 5 %	
Reverse polarity protection		reverse polarity protected	
Short-circuit protection		pulsing $I_{max} \leq 500$ mA	
Voltage drop	U_d	≤ 2 V	
Repeat accuracy	R	≤ 1.5 mm	
Operating current	I_L	0 ... 100 mA	
Off-state current	I_r	0 ... 50 μ A typ. 5 μ A	
No-load supply current	I_0	≤ 15 mA	
Switching state indicator		LED, yellow	

Functional safety related parameters

MTTF _d	941 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Indicators/operating means

Potentiometer	sensitivity adjustment
---------------	------------------------

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

Mechanical specifications

Connection type	Cable connector M12 x 1, 4-pin PUR, L = 1 m
Core cross-section	0.34 mm ²
Housing material	PBT
Sensing face	PBT
Degree of protection	IP67
Tightening torque, housing screws	≤ 1 Nm

General information

Note	Screw-in depth of housing screws, max. 10 mm
------	--


Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007


Approvals and certificates

UL approval	cULus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤ 36 V


Dimensions

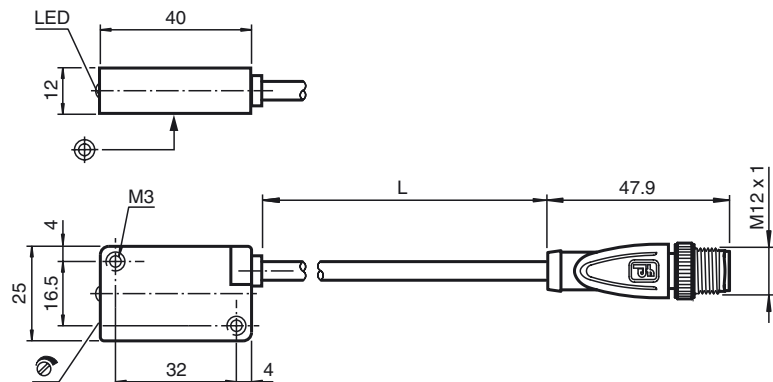

Electrical Connection



Pinout



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Installation Conditions

