

Bulk Raw Cable

CBL-PVC-BU-02X034-100M




- Suitable for NAMUR technology
- Suitable for routing intrinsically safe circuits in accordance with DIN EN 60079-14:2014

Cable, PVC/PVC, 2-core blue



Dimensions

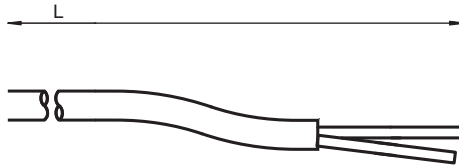

Technical Data

Electrical specifications

Operating voltage	U_B	max. 300 V AC/DC
Inductance per unit length	R'	max. 0.053 Ω/m
Capacitance per unit length	C'	101.8 nF/km
Inductance per unit length	L'	0.581 mH/km

Ambient conditions

Ambient temperature		
Cable, fixed		-25 ... 70 °C (-13 ... 158 °F)
Cable, flexing		-5 ... 70 °C (23 ... 158 °F)
Pollution degree		3

Mechanical specifications

Cable		according to IEC/EN 60228 (DIN VDE 0295) class 5
Sheath diameter		4.8 mm \pm 0.2 mm
Bending radius		> 10 x cable diameter, fixed > 15 x cable diameter, moving
Sheath color		blue (similar to RAL 5015)
Number of cores		2

Release date: 2021-04-09 Date of issue: 2021-04-09 Filename: 268448_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Technical Data

Core cross-section		0.34 mm ²
Cores color		Core 1: brown Core 2: blue
Core construction		19 x 0.15 mm Ø
Length	L	100 m
Cable code		Li YY 2 x 0,34
Material		
Cable		
Sheathing		PVC
Core insulation		PVC

Connection

