




Field-attachable male connector V45-GP

- Industrial Ethernet
- For PROFINET
- Field attachable
- All-round shielding (360°) for full EMC protection
- Insulation displacement connection
- Immunity to vibration, with mechanical latching
- For outdoor use

Male connector RJ45 straight 4-pin, Cat5, shielded, field-attachable, Outdoor



Dimensions

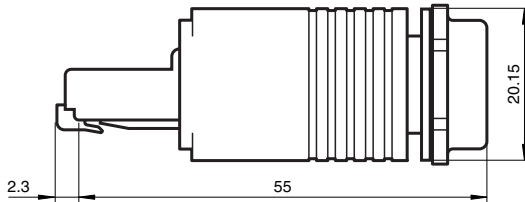

Technical Data

General specifications

Connector 1		
Connection		plug
Construction type		RJ45
Style		straight
Locking		Push/pull
Number of pins		4

Electrical specifications

Operating voltage	U_B	max. 50 V AC / 60 V DC
Operating current	I_B	max. 1 A

Conformity

Degree of protection	EN 60529	
Transmission technology	Cat. 5 Class D up to 100 MHz	
Plug connection	connector RJ45 : IEC 61076-3-106 V4	
Component category	CAT5 (IEC 11801)	

Ambient conditions

Ambient temperature	-40 ... 70 °C (-40 ... 158 °F)	
---------------------	--------------------------------	--

Release date: 2021-04-23 Date of issue: 2021-04-23 Filename: 202387_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Mechanical specifications

Plug connector		
Loosening protection		available
Mating cycles		min. 750
Shielding		via Body
Degree of protection		IP67
Cable		
Sheath diameter		4.9 ... 8.6 mm
Core cross-section		solid: 0.26 ... 0.32 mm ² (23 ... 22 AWG) stranded: 0.22 ... 0.32 mm ² (24 ... 22 AWG)

Material

Plug connector		
Body		thermoplastic, black
Flammability		V-0