





Model number

WCS-PG310
WCS Profibus interface module

Features

- Up to 4 read heads can be connected
- DIN rail mounting
- Integrated switch
- PROFIBUS interface

Dimensions

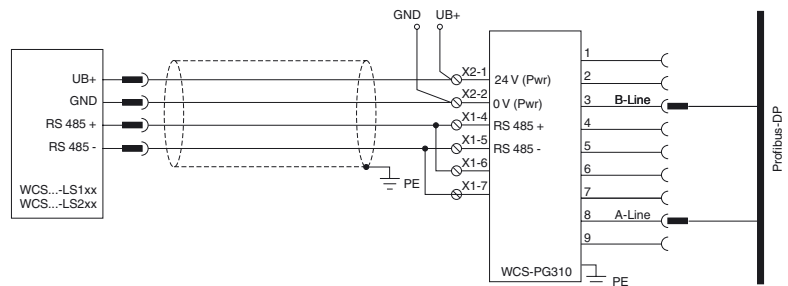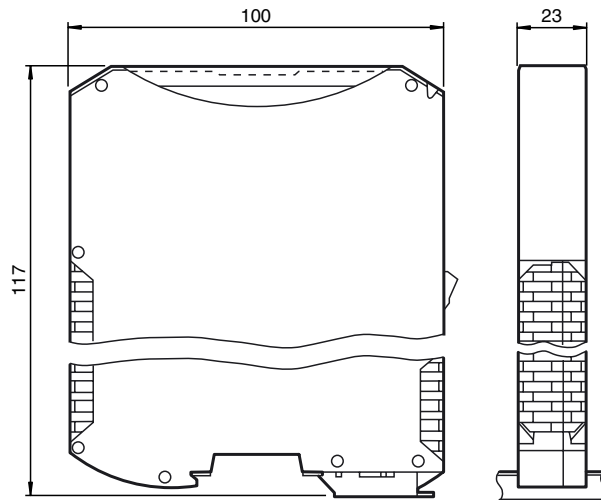

Technical data

General specifications		
Installation	DIN rail mounting	
Functional safety related parameters		
MTTF _d	180 a	
Mission Time (T _M)	20 a	
Diagnostic Coverage (DC)	0 %	
Electrical specifications		
Operating voltage	U _B	10 ... 30 V DC
Power consumption	P ₀	≤ 3.6 W (without read heads)
Interface 1		
Connection of	control system	
Interface type	PROFIBUS DP V1	
Transfer rate	max. 12 MBit/s , Automatic baud rate detection	
Data output format	binary code	
Bus termination resistor	switchable	
Interface 2		
Connection of	control system	
Connectable read heads	WCS...-LS221 , WCS...-LS121	
Interface type	RS-485	
Transmission method	half duplex	
Transfer rate	62.5 kBit/s	
RS485 termination resistor	switchable	
Refresh cycle of read head	1 ms	
Standard conformity		
Emitted interference	EN 55011, cl. A: 2007	
Noise immunity	EN 61000-6-2:2005	
Ambient conditions		

Release date: 2018-07-05 10:20 Date of issue: 2018-07-05 276147_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Operating temperature	0 ... 55 °C (32 ... 131 °F) , no moisture condensation
Storage temperature	-40 ... 70 °C (-40 ... 158 °F)
Relative humidity	≤ 80 %

Mechanical specifications

Connection type	Interface 1: 9-pin Sub-D connector Interface 2: terminal connection ≤ 2.5 mm ² , 7-pin
Housing width	23 mm
Housing height	111 mm
Housing depth	115 mm
Degree of protection	IP20
Material	plastic
Installation position	any position
Mass	approx. 200 g