




Q12RB6FF50CR

► Q12 SERIES MINIATURE SELF-CONTAINED SENSOR

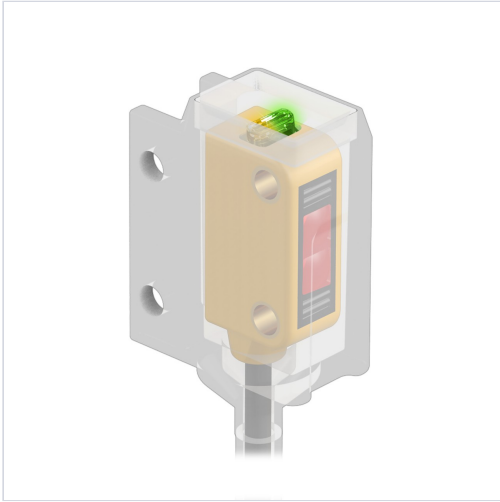

WORLD-BEAM Q12 Series: Chemically Resistant; FF

Range: 48 mm; Input 10-30V dc

Output: DO (Dark Operate) bipolar: 1 NPN; 1 PNP

2m (6 ft) Cable

Part Number: 76485

CERTIFICATIONS



SPECIFICATIONS

Sensing Mode (General)	Proximity
Sensing Mode (Detailed)	Background Suppression (Fixed)
Housing Style	Rectangular
Primary Housing Material	Thermoplastic
Input/Output	Discrete
Max Sensing Range (mm)	50
Outputs	Bipolar (NPN & PNP)
Power Supply/Supply Voltage	10-30 V dc
Connection	2 m Cable
Quick Disconnect Type	No QD
Sensing Beam	Visible Red LED
Operation	Dark Operate

Max Op. Temp. (°C)	55
Min Op. Temp. (°C)	-20
Output response time (ms)	0.7
Special Feature: Intrinsically Safe	No
Special Feature: Remote Teach	No
Special Feature: Water Detection	No
IP Rating	IP67
Sensing Beam Wavelength	640
Delay at Power-up (ms)	120
Repeatability (µs)	175
Number of Pins	3
Max Op. Relative Humidity [%]	95% @ 50°C
Lens Material	Polycarbonate
Adjustments	N/A
Barrel Diameter (mm)	N/A
Indicator	LEDs
Opposed Mode Emitter/Receiver	N/A
Feature: Timing (Hold/Delay)	No
Feature: Encapsulated	No
Feature: Hazardous Area	No
Feature: Audible	No
Feature: Chemical Resistant	Yes



RECOMMENDED PRODUCTS

ADAPTERS, BRACKETS, CLAMPS AND MOUNTING ACCESSORIES



SMBQ12A

Bracket: Right-Angle; Stainless Steel; Used with Q12

	SMBQ12T
Bracket: Right-Angle Mount; Stainless Steel: 300 Series; 20 Gauge; Used with Q12	
	SMBQ12S
Bracket: Side Mount; Stainless Steel; Used with Q12	



Banner Engineering Corp. | 9714 Tenth Avenue North | Minneapolis, MN 55441 | United States of America