

# **Q60VR3AFV1000Q1**

## Q60 SERIES 2 M RANGE ADJUSTABLE-FIELD SENSOR



Q60 Series: Adjust-Field Visable Red Univer Volt

Range: 200-1000 m; Input: 12-250V dc or 24-250V

ас

Output: Electromechanical Relay (SPST)

Micro Style Quick-Disconnect Connector

Part Number: 70095

## CERTIFICATIONS








# **SPECIFICATIONS**

Sensing Mode (General)	Proximity
Sensing Mode (Detailed)	Background Suppression (Adjustable)
Housing Style	Rectangular
Primary Housing Material	Thermoplastic
Input/Output	E/M Relay
Max Sensing Range (mm)	1000
Outputs	SPST e/m Relay
Power Supply/Supply Voltage	12-250 V dc or 24-250 V ac
Connection	Integral QD

Quick Disconnect Type	1/2 in. (Micro)
Sensing Beam	Visible Red LED
Operation	Light/Dark Operate
Max Op. Temp. (°C)	55
Min Op. Temp. (°C)	-20
Output response time (ms)	15
Special Feature: Intrinsically Safe	No
Special Feature: Remote Teach	No
Special Feature: Water Detection	No
IP Rating	IP67
Delay at Power-up (ms)	150
Repeatability (μs)	500
Number of Pins	4
NEMA Rating	NEMA 6
Max Op. Relative Humidity [%]	90% @ 50°C
Lens Material	Acrylic
Adjustments	Screw Adjustment
Barrel Diameter (mm)	N/A
Indicator	LEDs
Opposed Mode Emitter/Receiver	N/A
Feature: Timing (Hold/Delay)	Yes
Feature: Encapsulated	No
Feature: Hazardous Area	No
Feature: Audible	No

## RECOMMENDED PRODUCTS

# ADAPTERS, BRACKETS, CLAMPS AND MOUNTING ACCESSORIES

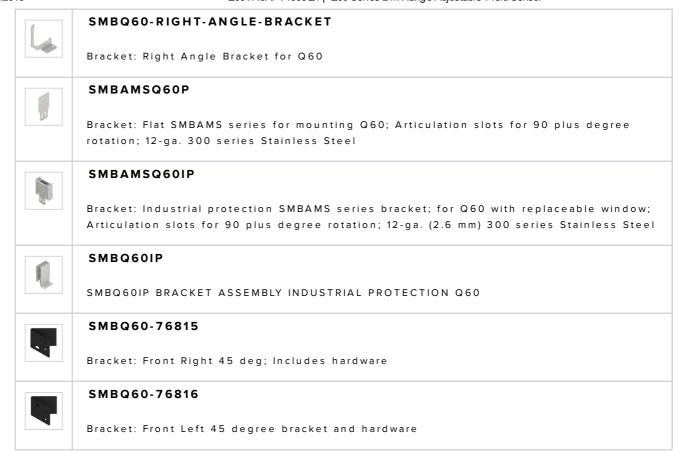



Banner Engineering Corp. | 9714 Tenth Avenue North | Minneapolis, MN 55441 | United States of America