
Light Curtain for Measuring Tasks

OEEI202U0135



- Graphical display for easy operation
- Integrated evaluation unit
- Object detection and measurement
- Recognition of small parts

As these light curtains for measurement task are equipped with an integrated evaluation unit, external connection units are not needed. Objects are both recognized (via the digital output) and measured (via the analog output). The light curtains can be set up easily using the menu-controlled graphic display. Convenient parametrization and quick diagnosis is possible via the IO-Link interface. The adequate mounting angle BEF-SET-33 is included in the delivery.

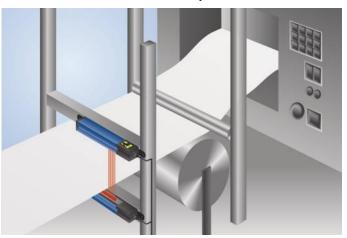

Technical Data

echnicai Data				
Optical Data				
Range	2000 mm			
Measurement Field Height (MFH)	200 mm			
Beam Distance	2 mm			
Light Source	Infrared Light			
Service Life (T = +25 °C)	100000 h			
Max. Ambient Light	10000 Lux			
Opening Angle	10 °			
Electrical Data				
Sensor Type	Receiver			
Supply Voltage	1830 V DC			
Current Consumption (Ub = 24 V)	< 60 mA			
Switching Frequency	45 Hz			
Response Time	11 ms			
On-/Off-Delay	010 s			
Temperature Drift	< 10 %			
Temperature Range	-2560 °C			
Number of Switching Outputs	2			
Switching Output Voltage Drop	< 2,5 V			
Switching Output/Switching Current	100 mA			
Residual Current Switching Output	< 50 μA			
Analog Output	010 V/420 mA			
Short Circuit and Overload Protection	yes			
Reverse Polarity Protection	yes			
Lockable	yes			
Interface	IO-Link V1.0			
Protection Class	III			
Mechanical Data				
Setting Method	Menu (OLED)			
Housing Material	Aluminum			
Degree of Protection	IP65			
Connection	M12 × 1; 4/5-pin			
Switchable to NC/NO	•			
Configurable as PNP/Push-Pull	Ŏ			
Error Output				
IO-Link	Ŏ			
Connection Diagram No.	188			
Control Panel No.	X2			
Suitable Connection Equipment No.	2 35			
Suitable Mounting Technology No.	700			

Suitable Emitter

OSEI202Z0103

Display brightness may decrease with age. This does not result in any impairment of the sensor function.


Complementary Products

Analog Evaluation Unit AW02

IO-Link Master

Software



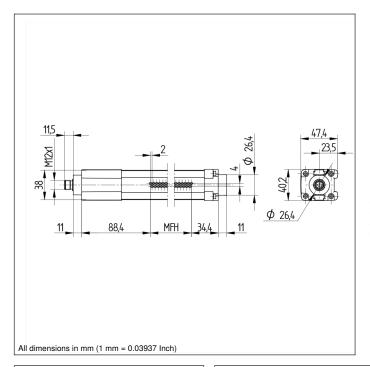


Ctrl. Panel



20 = Enter Button 22 = UP Button

23 = Down Button

60 = Display



Leger	nd		PT	Platinum measuring resistor	EN	AR5422	Encoder A/Ā (TTL)
+	Supply Voltage +		nc	not connected	EN	BR5422	Encoder B/B (TTL)
_	Supply Voltage 0 V		U	Test Input	EN	A	Encoder A
~	Supply Voltage (AC Voltage)		Ū	Test Input inverted	EN	В	Encoder B
Α	Switching Output	(NO)	W	Trigger Input	Ам	N	Digital output MIN
Ā	Switching Output	(NC)	W-	Ground for the Trigger Input	Ам	ΑX	Digital output MAX
V	Contamination/Error Output	(NO)	0	Analog Output	Aor	(Digital output OK
V	Contamination/Error Output	(NC)	0-	Ground for the Analog Output	SY	ln	Synchronization In
E	Input (analog or digital)		BZ	Block Discharge	SY	OUT	Synchronization OUT
Т	Teach Input		Awv	Valve Output	OLT		Brightness output
Z	Time Delay (activation)		а	Valve Control Output +	М		Maintenance
S	Shielding		b	Valve Control Output 0 V	rsv		reserved
RxD	Interface Receive Path		SY	Synchronization	Wir	Wire Colors according to DIN IEC 757	
TxD	Interface Send Path		SY-	Ground for the Synchronization	Bk	(Black
RDY	Ready		E+	Receiver-Line	BN	1	Brown
GND	Ground		S+	Emitter-Line	RE)	Red
CL	Clock		±	Grounding	00	à .	Orange
E/A	Output/Input programmable		SnR	Switching Distance Reduction	YE		Yellow
•	IO-Link		Rx+/-	Ethernet Receive Path	G1	1	Green
PoE	Power over Ethernet		Tx+/-	Ethernet Send Path	BU	J	Blue
IN	Safety Input		Bus	Interfaces-Bus A(+)/B(-)	VT		Violet
OSSD	Safety Output		La	Emitted Light disengageable	GY	1	Grey
Signal	Signal Output		Mag	Magnet activation	W	Н	White
BI_D+/-	- Ethernet Gigabit bidirect, data	line (A-D)	RES	Input confirmation	PK		Pink
	2 Encoder 0-pulse 0-0 (TTL)		EDM	Contactor Monitoring	GN	1YE	Green/Yellow











