



Q4XTBCOD300-Q8

► Q4X SERIES RUGGED LASER DISTANCE SENSOR



Q4X Series: Clear Object

Range: 300 mm; Input 10-30 V dc

Outputs: Bipolar: 1 NPN; 1 PNP

Connection: Euro M12 5-Pin Integral Connector

Part Number: 95292

CERTIFICATIONS



SPECIFICATIONS


Sensing Mode (General)	Proximity
Sensing Mode (Detailed)	Background/Foreground Suppression
Housing Style	Rectangular w/M18 Mount
Primary Housing Material	Stainless Steel
Laser Classification	Class 1
Input/Output	Discrete
Indicator	Display; LED(s)
Max Sensing Distance (mm)	300
Minimum Sensing Distance (mm)	25

Sensing Beam	Visible Red Laser
Power Supply	10-30 V dc
Delay at Power-up (ms)	750
Sensing Beam Wavelength (nm)	655
Adjustments	Push Button; Remote Teach
Connection	Integral QD
QD Type/Cable Length	M12 (Euro) requires mating cordset
Number of Pins	5
Vibration	MIL-STD-202G req. Method 201A (vibration:10 to 60Hz max., double amplitude 0.06", max acc. 10G).
Mechanical Shock	MIL-STD-202G, Meth. 213B, Cond. I (100G 6x along X, Y & Z axes, 18 total shocks) w/ sensor operating
Output Saturation Voltage NPN Outputs	<1.0 V @ 100 mA
Output Saturation Voltage PNP Outputs	<1.5 V @ 100 mA
Max Discrete (Switched) Output (mA)	100
Discrete (Switched) Outputs	Bipolar (NPN & PNP)
Output Protection	Protected against continuous overload and short circuit
IP Rating	IP67; IP68; IP69K
Storage Temperature (°C)	-25 to 75
Max Operating Temperature (°C)	50
Min Operating Temperature (°C)	-10
Max Op. Relative Humidity Non-Condensing (%)	95 at 55°C
Window Material	Acrylic
Warm-up Time (minutes)	10
Minimum Response Time (ms)	1.5
Spot Size (@ Reference Distance)	2.0 mm x 0.8 mm @ 300 mm
Barrel Diameter (mm)	18
Laser Control	Yes


Alarm Output (mA)	100
Max Ambient Light (Lux)	5000
Max Off-state Leakage Current (μA)	5 @ 30 V dc
Power/Current Consumption (exclusive of load)	< 675 mW
Supply Protection Circuitry	Protected against reverse polarity and transient overvoltages
Feature: Remote Teach	Yes
Feature: Washdown Rated	Yes
Feature: Clear Object Detection	Yes
Feature: Timing (Hold/Delay)	Yes
Feature: Ecolab Certified	Yes
Feature: Chemical Resistant	Yes
IO Link	No
Wireless	No

DIAGRAMS

WIRING DIAGRAM

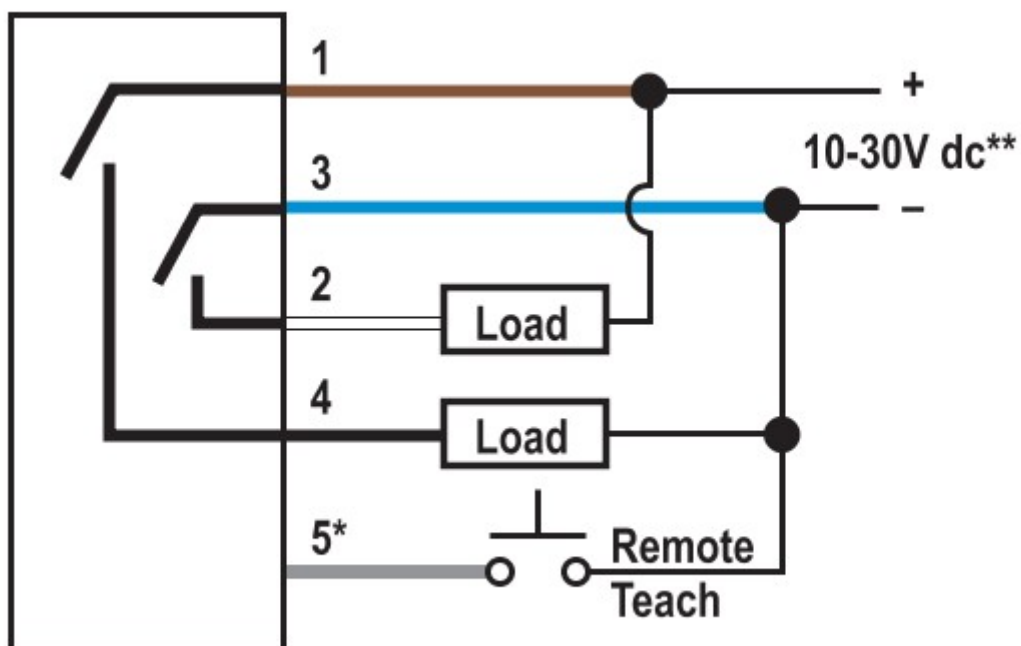



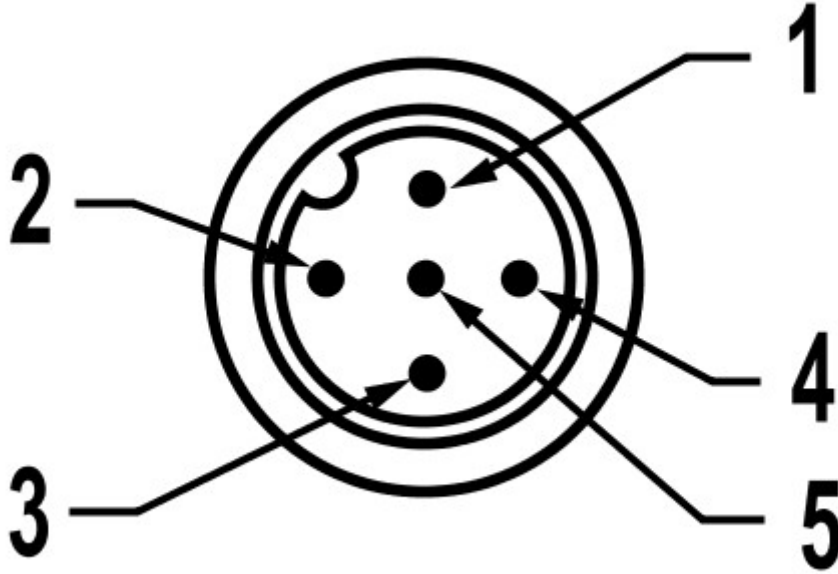






PIN OUT



RECOMMENDED PRODUCTS

SINGLE ENDED CORDSETS



	<p>MQDC1-506</p> <p>Euro-style Quick Disconnect Cable; 5 Pin Straight Connector; 2 m (6.5 ft) in Length; Chrome plated brass coupling nut</p>
	<p>MQDC1-515</p> <p>Euro-style Quick Disconnect Cable; 5 Pin Straight Connector; 5 m (15 ft) in Length; Chrome plated brass coupling nut</p>
	<p>MQDC1-530</p> <p>Euro-style Quick Disconnect Cable; 5 Pin Straight Connector; 9 m (30 ft) in Length; Chrome plated brass coupling nut</p>
	<p>MQDC1-506RA</p> <p>Euro-Style Quick Disconnect Cable; 5-Pin Right-Angle Connector; 2 m (6.5 ft) in Length; Chrome-plated brass coupling nut</p>
	<p>MQDC1-515RA</p> <p>Euro-Style Quick Disconnect Cable; 5-Pin Right-Angle Connector; 5 m (15 ft) in Length; Chrome-plated brass coupling nut</p>
	<p>MQDC1-530RA</p> <p>Euro-Style Quick Disconnect Cable; 5-Pin Right-Angle Connector; 9 m (30 ft) in Length; Chrome-plated brass coupling nut</p>

	<p>MQDC-WDSS-0506</p> <p>Euro-style Quick Disconnect Cable; 5-Pin Straight Connector for F&B Applications; 2 m (6.5 ft) in Length abrasion resistant PVC cable; Stainless Steel hex coupling nut and EPDM o-ring</p>
	<p>MQDC-WDSS-0515</p> <p>Euro-style Quick Disconnect Cable; 5-Pin Straight Connector for F&B Applications; 5 m (15 ft) in Length abrasion resistant PVC cable; Stainless Steel hex coupling nut and EPDM o-ring</p>
	<p>MQDC-WDSS-0530</p> <p>Euro-style Quick Disconnect Cable; 5-Pin Straight Connector for F&B Applications; 9 m (30 ft) in Length abrasion resistant PVC cable; Stainless Steel hex coupling nut and EPDM o-ring</p>

ADAPTERS, BRACKETS, CLAMPS AND MOUNTING ACCESSORIES

	<p>SMBQ4XFA</p> <p>Bracket: Kit for 12 mm (1/2 in) Rod Bracket Systems; for: Q4X, QS18, QS30; Includes 3/8-16 X 2 in. Socket Head Cap Screw (SHCS)</p>
	<p>SMBQ4XFAM10</p> <p>Bracket: Kit for 10 mm (3/8 in) Rod Bracket Systems; for: Q4X, QS18, QS30; Includes M10-1.5 X 50 mm; Socket Head Cap Screw (SHCS)</p>
	<p>SMBQ4XFAM12</p> <p>Bracket: Kit for 12 mm (1/2 in) Rod Bracket Systems; for: Q4X, QS18, QS30; No Socket Head Cap Screw (SHCS) included</p>
	<p>SMB18FA</p> <p>Bracket: Kit for 12 mm (1/2 in.) Rod Bracket Systems for; most 18 mm barrel mount sensors; lights; and brackets; Includes 3/8-16 X 2 in. Socket Head Cap Screw (SHCS)</p>
	<p>SMB18FAM10</p> <p>Bracket: Kit for 10 mm (3/8 in) Rod Bracket Systems for; most 18 mm barrel mount sensors; lights; and brackets; Includes M10-1.5 X 50 mm Socket Head Cap Screw (SHCS)</p>
	<p>SMB18FAM12</p> <p>Bracket: Kit for 12 mm (1/2 in) Rod Bracket Systems for; most 18 mm threaded barrel sensors; lights; and brackets; No Socket Head Cap Screw (SHCS) included</p>
	<p>SMB18A</p> <p>Bracket: 18 mm Right Angle-mount; Material: 11 Gauge Stainless Steel; Curved mounting slot for versatility/orientation ; Clearance for M4 #8 hardware</p>

REFERENCE TARGET

	BRT-Q4X-60X18 Reflector; Q4X Clear Object Detection; Rectangular 60 mm X 18 mm
	BRT-Q4X-60X50 Reflector; Q4X Clear Object Detection; Rectangular 60 mm X 50 mm

ACCESSORIES

	APC-18 APC-18 AIR PURGE COLLAR
	APC-18P APC-18P AIR PURGE COLLAR DELRIN



Banner Engineering Corp. | 9714 Tenth Avenue North | Minneapolis, MN 55441 | United States of America